DELAWARE RIVER BASIN

KEEN LAKE DAM
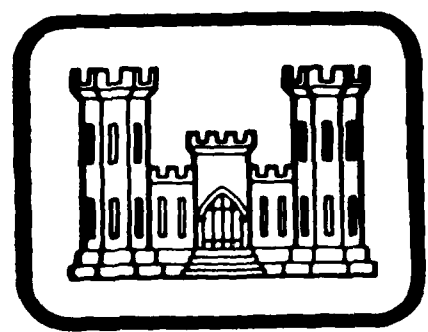
NDI NO. PA-00092
DER NO. 64-13

WAYNE COUNTY, PENNSYLVANIA

PHASE I INSPECTION REPORT
NATIONAL DAM INSPECTION PROGRAM

LEVEL

DTIC
ELECTE
MAR 1 1 1980

S

A

PREPARED FOR

DEPARTMENT OF THE ARMY
Baltimore District, Corps of Engineers
Baltimore , Maryland 21203

BY

Berger Associates, Inc.
Harrisburg , Pennsylvania

JANUARY 1980

80 3 11 036

DISCLAIMER NOTICE

THIS DOCUMENT IS BEST QUALITY
PRACTICABLE. THE COPY FURNISHED
TO DDC CONTAINED A SIGNIFICANT
NUMBER OF PAGES WHICH DO NOT
REPRODUCE LEGIBLY.

PREFACE

This report has been prepared under guidance contained in the Recommended Guidelines for Safety Inspection of Dams, for Phase I Investigations. Copies of these guidelines may be obtained from the Office of Chief of Engineers, Washington, D.C. 20314. The purpose of a Phase I investigation is to identify expeditiously those dams which may pose hazards to human life or property. The assessment of the general condition of the dam is based upon available data and visual inspections. Detailed investigation, and analyses involving topographic mapping, subsurface investigations, testing, and detailed computational evaluations are beyond the scope of a Phase I investigation; however, the investigation is intended to identify any need for such studies. (15) DACW31-80-C-0019

In reviewing this report, it should be realized that the reported condition of the dam is based on observations of field conditions at the time of inspection along with data available to the inspection team. In cases where the reservoir was lowered or drained prior to inspection, such action, while improving the stability and safety of the dam, removes the normal load on the structure and may obscure certain conditions which might otherwise be detectable if inspected under the normal operating environment of the structure.

(11) Jan 80 (12) 107

It is important to note that the condition of a dam depends on numerous and constantly changing internal and external conditions, and is evolutionary in nature. It would be incorrect to assume that the present condition of the dam will continue to represent the condition of the dam at some point in the future. Only through frequent inspections can unsafe conditions be detected and only through continued care and maintenance can these conditions be prevented or corrected.

Phase I inspections are not intended to provide detailed hydrologic and hydraulic analyses. In accordance with the established Guidelines, the spillway design flood is based on the estimated "Probable Maximum Flood" for the region (greatest reasonably possible storm runoff), or fractions thereof. The spillway design flood provides a measure of relative spillway capacity and serves as an aid in determining the need for more detailed hydrologic and hydraulic studies, considering the size of the dam, its general condition and the downstream damage potential.

41100
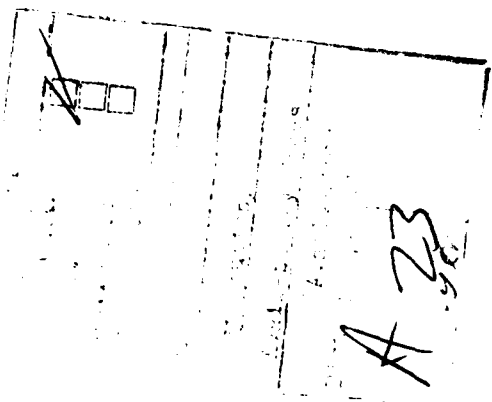
PHASE I REPORT

NATIONAL DAM INSPECTION PROGRAM

BRIEF ASSESSMENT OF GENERAL CONDITIONS
AND RECOMMENDATIONS

Name of Dam: KEEN LAKE DAM

State & State No.:   PENNSYLVANIA, PA-00092

County: WAYNE

Stream: VAN AUKEN CREEK

Date of Inspection: October 23, 1979

DACW31-80-C-0019

Based on the visual inspection, past performance and the available engineering data, the dam and its appurtenant structures appear to be in fair condition.

In accordance with the Corps of Engineer's evaluation guidelines, the size classification of this dam is intermediate and the hazard classification is high. The spillway capacity is inadequate for passing the PMF (Probable Maximum Flood) peak inflow without overtopping the dam. The project is capable of passing only 14 percent of the PMF. Failure of this dam will significantly increase the hazard to loss of life downstream from the dam. The spillway capacity is seriously inadequate. The project, therefore, is considered to be unsafe, non-emergency.

The following recommendations are made for immediate action by the owner:

1. That a detailed hydrologic and hydraulic engineering analysis be made by a professional engineer with experience in the design and construction of dams to determine means for improving the capacity of the spillway and reservoir system.

2. That all trees and brush be removed from the embankment and that this work be performed on a regular maintenance schedule. The embankment should be protected with an adequate vegetative cover.

3. That the walls of the spillway and sluiceway be pointed and capped to insure its structural integrity.

4. That the leakage at the downstream wall be monitored on a regular basis noting and recording approximate volume and the clarity. If increase in volume or any turbidity is observed, immediate steps shall be taken to identify and correct the condition.

5. That a formal surveillance and downstream warning system be developed to be used during periods of heavy or prolonged rainfall.

6. That a program be developed for regular inspection and maintenance of the facilities.

SUBMITTED BY:

BERGER ASSOCIATES, INC.
HARRISBURG, PENNSYLVANIA

DATE: January 25, 1980

APPROVED BY

JAMES W. PECK
Colonel, Corps of Engineers
District Engineer

DATE 25 Feb 1980

OVERVIEW

KEEN LAKE DAM

Photograph No. 1

iv

TABLE OF CONTENTS

PHASE 1 INSPECTION REPORT
NATIONAL DAM INSPECTION PROGRAM

KEEN LAKE DAM

NDI-ID NO. PA-00092
DER-ID NO. 64-13

SECTION 1 - PROJECT INFORMATION

1.1 GENERAL

A. Authority

The Dam Inspection Act, Public Law 92-367, authorized the
Secretary of the Army, through the Corps of Engineers, to initiate a
program of inspections of dams throughout the United States.

B. Purpose

The purpose of this inspection is to determine if the dam
constitutes a hazard to human life and property.

1.2 DESCRIPTION OF PROJECT

A. Description of Dam and Appurtenances

Note: Project datum elevation is not available. The
reservoir pool elevation shown on U.S.G.S. Quad-
rangle as Elevation 1272, is assumed to be normal
pool elevation (top of spillway weir).

Keen Lake Dam, also known as Keen's Pond Dam is an earthfill
embankment with a downstream vertical masonry stone wall. The maximum
height of the dam is about 26 feet above streambed. The dam has an
overall length of 200 feet. A 24 foot wide spillway is located near the
center of the dam. This broadcrested weir has a crest elevation of 5.5
feet below the low point of the embankment. Adjacent to the spillway is
a sluiceway opening, which is controlled with stoplogs. Removal of the
stoplogs permits lowering of the pool level to about 11 feet below
normal pool elevation. All structures for spillway and sluiceway are
constructed with stone.

A fill was placed across the reservoir about 400 feet upstream
from the dam for a railroad track. This fill was originally about
twenty feet higher than the dam embankment. After the track was

-1-

abandoned, a large part of the fill was excavated and removed. A 160 foot± section of this fill is now below the crest elevation of the downstream dam. A ‸ foot wide stone arch extends through this fill and connects the large upstream reservoir with the small pond between the two embankments.

B. <u>Location</u>:

Canaan Township, Wayne County
U.S.G.S. Quadrangle - Honesdale, Pa.
Latitude 41°-35.5', Longitude 75°-22.4'
Appendix E, Plate I & II

C. <u>Size Classification</u>:

Intermediate. (Height: 26 feet
Storage 1449 acre-feet)

D. <u>Hazard Classification</u>:

High (Refer to Section 3.1.E)

E. <u>Ownership</u>:

James L. Keen
R.D. #1, Box 278
Waymart, PA 18472

F. <u>Purpose</u>:

Recreation

G. <u>Design and Construction History</u>

The dam was designed and constructed by the Delaware and Hudson Canal Company before 1851. That is the year the company received water flow rights from Jacob Keen, who owned the land covered by the water. Records of the design or construction do not exist, but it appears that the dam was constructed at the low end of a relatively wide valley in which a natural pond was located. Over the years, repairs were made consisting of replacing wooden floors in spillway and sluiceway, pointing and guniting of stone walls and the replacement of the stoplogs.

H. <u>Normal Operating Procedures</u>

The reservoir is used for recreational purposes including swimming, boating and fishing. Cottages are located near the water's edge. Normal pool elevation (top of spillway weir) is desirable. All inflow above that level is discharged through the spillway and sluiceway.

1.3 <u>PERTINENT DATA</u>

A. <u>Drainage Area</u> (square miles)

From files:	15.8
Computed for this report:	14.5
Use:	14.5

-2-

B.   Discharge at Dam Site (cubic feet per second)
     See Appendix D for hydraulic calculations

     Maximum known flood, May 23, 1943, based on
     records for the U.S.G.S. gaging station which
     is located near Forest City in the adjoining
     Lackawanna River Watershed   1153

     Spillway capacity at pool Elev. 1277.5
     (low point of dam)   973

     Sluiceway capacity over stoplogs at Elev. 1277.5   279

C.   Elevation (feet above mean sea level)

     Top of dam (low point)   1277.5

     Spillway crest   1272.0

     Sluiceway opening top of stoplogs   1272.7

     Bottom sluiceway   1261.7

     Streambed at centerline of dam - estimate   1251

D.   Reservoir (miles)

     Length of normal pool   0.9

     Length of maximum pool   1.0

E.   Storage (acre-feet)

     Spillway crest (Elev. 1272.0)   887

     Top of dam (Elev. 1277.5)   1449

F.   Reservoir Surface (acres)

     Top of dam (Elev. 1277.5)   113

     Spillway crest (Elev. 1272.0)   92

G.   Dam

     Refer to Plate IV in Appendix E for plan and Plate A-III in
     Appendix A for section.

Type: Earthfill embankment with a vertical downstream masonry wall.

Length: 200 feet.

Height: 26 feet.

Top Width: Varies, about 20 feet.

Side Slopes: Upstream - 2.8H to 1V (above water surface)
              Downstream - Vertical (Stone wall)

Zoning: None.

Cutoff: Wall perhaps founded on rock.

Grouting: None.

H. Outlet Facilities

Stoplogs in 8' wide channel adjacent to spillway.

I. Spillway

Type: Uncontrolled broad crested weir with sloping crest.

Length of weir: 26 feet.

Crest elevation: 1272.

J. Regulating Outlets

See Section 1.3.H. above.

SECTION 2 - ENGINEERING DATA

2.1 DESIGN

Design data for Keen Lake Dam are not available in the files of the Pennsylvania Department of Environmental Resources (PennDER) nor in the files of the owner. The available drawings consist of a property survey map and two drawings indicating repairs made in 1932 and 1942. The two drawings are reproduced in Appendix E of this report (Plates III & IV).

2.2 CONSTRUCTION

Records of construction of this dam are not available.

2.3 OPERATION

Records of operation have not been maintained. Correspondence in the PennDER files indicate that the dam was overtopped during floods in May 1942 and August 1955. The records for 1942 are conflicting. One letter states an overtopping of 3 feet, another letter mentions 9 inches over the dam. Washouts occurred on the downstream side at both abutments. A photograph taken in August 1955 shows the present owner indicating an overtopping height of about three feet. During the recent inspection, the owner stated that this height was exaggerated at that time.

2.4 EVALUATION

The only engineering data available for examination were contained in the files of PennDER, Bureau of Dam Safety. The data was limited to two drawings and a letter file.

A. Adequacy

While the available information contained in the files are limited, they are considered sufficient to make a reasonable assessment of the overall condition of the dam and its appurtenances.

B. Operating Records

Formal operating records have not been maintained for this dam.

C. Post Construction Changes

The existing drawings indicate a timber floor in the spillway and sluiceway (Plate IV, Appendix E). This planking has been replaced with a concrete slab. The wooden gate in the sluiceway has been replaced by wooden stoplogs.

A concrete wall was placed at both ends of the embankment (Plate IV) to divert overtopping water away from the downstream abutment fill.

Reports and photographs indicate that the upstream side of the spillway was gunited in 1933 in an effort to reduce leakage through the downstream wall and spillway walls. Reports indicate that a 4 foot deep trench was excavated at the upstream side of the spillway and sluiceway. A concrete cut-off wall was placed in this trench and tied to the spillway slab. The original timber cut-off wall was at that time in good condition, but there was not a good junction between the sheeting and spillway floor, causing some of the leakage.

SECTION 3 - VISUAL INSPECTION

3.1 FINDINGS

A. General

The general appearance of Keen Lake Dam is fair. This relatively old structure consists of an earthfill embankment and a downstream handlaid masonry stone wall. A number of trees are on top of the embankment. Seepage is occurring at the downstream side of the stone wall and the spillway is in need of some repair.

The reservoir is used for recreation, including fishing, boating and swimming. The dam and a part of the reservoir is owned by Mr. James Keen, who has developed a camping and cottage resort area immediately upstream of the dam. Mr. Keen accompanied the inspectors during their inspection.

The visual inspection check list is in Appendix A of this report. This appendix also has several sketches made from survey information obtained by the inspection team. Included are a general plan, profile, typical section and several details. Photographs taken during the inspection are reproduced in Appendix C.

B. Embankment

The actual embankment is relatively short, about 110 feet to the left of the spillway and about 50 feet at the right side of the spillway. The upstream slope is flat and is unprotected by grass or riprap. However, an upstream embankment across the reservoir prevents any wave action at the dam. The top width of the embankment varies considerably, with about a minimum width of 20 feet. The top of the embankment is covered with many trees, some of them close to spillway walls and the downstream masonry wall. The downstream face of the embankment consists of a nearly vertical handlaid masonry stone wall, which appeared to be in good condition. No displacements or bulging were noticed, indicating that the wall is stable. Some seepage water was coming out of the wall at both sides of the spillway close to the bottom of the exposed wall. The amount of seepage does not appear to be serious for this type of dam.

Concrete walls were added at both abutments. Both walls tie in with the higher sidehills and were apparently constructed to direct water from the hillside and any overtopping water of the reservoir away from the downstream joints between the dam and the hillside.

C. Appurtenant Structures

The spillway is formed from stone with a gunited surface. The gunite has cracked severely and the concrete cap of the walls is badly deteriorated. It appears that some stones could be dislodged with high discharges which could endanger the safety of the structure.

Adjacent to the 26 feet wide spillway and separated by a stone wall is an eight foot wide sluiceway. This sluiceway, also formed with stone walls, has a low flow elevation of 1261.7. Stoplogs in the sluiceway are placed to an elevation of about 8 inches above the spillway weir elevation. The stoplogs and the timbers supporting these logs were replaced in 1978 and are in good condition. No other methods of lowering the pool level are available for this dam.

D. Reservoir Area

The reservoir area has flat banks and appears to be stable. The right side of the reservoir is mostly wooded and the left side is used for cottages, homes, a campground and a swim beach. There are no reports of sedimentation.

A railroad embankment was constructed across the reservoir about 400 feet upstream of the dam. A 16 foot wide stone arch allows the water to flow from the main reservoir to the small pond between Keen Lake Dam and the railroad embankment. The arch is in excellent condition and the normal water depth at this location is about 7.3 feet (See Plate A-IV, Appendix A). A 160 foot long section of the railroad embankment is lower in elevation than the breast elevation of the Keen Lake Dam. The embankment has many trees growing on it. Several campsites are located on the embankment.

E. Downstream Channel

The discharge from the spillway and sluiceway falls over the downstream face of the stone wall and into the natural streambed which is about 100 feet wide near the dam. The banks are rocklined and steep on the right side and moderately steep on the left side. The slopes are wooded over the first 1,000 feet downstream beyond which the valley widens. There are six homes located in this widened valley which would be in the floodplain if the dam should fail due to overtopping. Therefore, the hazard category for Keen Lake Dam is "High."

3.2 EVALUATION

The visual evaluation of the facilities is fair. Trees on the embankment should be removed and some concrete repair work should be performed on the sluiceway. Although seepage is occurring, there is no serious concern as long as no fines are noticeable in the seepage water. This condition should, however, be monitored on a regular basis noting any change in volume of flow or clarity of the water.

SECTION 4 - OPERATIONAL PROCEDURES

4.1 PROCEDURES

The operational procedures for Keen Lake Dam are limited. The reservoir is used for recreation and keeping the pool level at spillway weir elevation is the major concern. All inflow above that level is discharged over the spillway.

4.2 MAINTENANCE OF DAM

The owner, Mr. James Keen, is of the opinion that tree roots on top of the embankment will hold the soil together if overtopping would occur. If the soil becomes saturated, a tree could topple over and dislodge a large area of the embankment. It is, therefore, more desirable to remove the trees and provide a good grass mat for protection of the embankment surface.

4.3 MAINTENANCE OF OPERATING FACILITIES

The sluiceway and stoplogs are in good condition. The overall condition of the spillway is good, except that some concrete capping on the top of the walls and some cementing of the vertical surfaces is required. There are no mechanical operating facilities and the lake can only be lowered by removal of stoplogs in the sluiceway. The maximum drawdown is about 11 feet below the spillway weir elevation.

4.4 WARNING SYSTEM

The owner of the property lives close to the dam and maintains a campground in the area. Although daily observations are made, there is no formal surveillance plan or downstream warning system.

4.5 EVALUATION

The operational procedures should be expanded and should include the removal of trees on the embankment. The area should then be seeded to provide a dense protective grass mat. The spillway should be inspected annually and necessary repair work should be performed.

A formal surveillance plan and downstream warning system should be developed for implementation during high or prolonged precipitation.

SECTION 5 - HYDROLOGY/HYDRAULICS

5.1 EVALUATION OF FEATURES

A. Design Data

The hydrologic and hydraulic analyses available from PennDER for Keen Lake Dam were not very extensive. No stage-discharge curve, stage-storage curve, unit hydrograph, nor flood routings were contained in the PennDER files.

B. Experience Data

The greatest known flood at Keen Lake Dam occurred in May 1942 when the dam was overtopped. The amount of overtopping was reported at several different depths ranging from nine inches to three feet. This flood event caused a considerable amount of erosion at both the left and right abutments.

C. Visual Observations

On the date of the inspection, no conditions were observed that would indicate that the appurtenant structures of the dam could not operate satisfactorily during a flood event, until the dam is overtopped.

D. Overtopping Potential

Keen Lake Dam has a total storage capacity of 1449 acre-feet and an overall height of 26 feet, both referenced to the top of the dam. These dimensions indicate a size classification of "Intermediate", the hazard classification is "High" (See Section 3.1.E).

The recommended Spillway Design Flood (SDF) for a dam having the above classification is the Probable Maximum Flood (PMF). For this dam, the PMF peak inflow is 17,056 cfs (See Appendix D for HEC-1 inflow computations).

Comparison of the estimated PMF peak inflow of 17,056 cfs with the estimated spillway discharge capacity of 1,252 cfs indicates that a potential for overtopping of the Keen Lake Dam exists.

An estimate of the storage effect of the reservoir and routing of the computed inflow hydrograph through the reservoir shows that this dam does not have the necessary storage available to pass the PMF without overtopping. The spillway-reservoir system can pass a flood event equal to 14% of a PMF.

-10-

D.   Dam Break Evaluation

The calculations to determine the behavior of the dam in the event of an overtopping and a resulting breaching of the embankment indicates that there will be a substantial increase in water levels downstream from the dam.

Several houses are located about 1,850 feet downstream from the dam. On the basis of the results of a dam break analysis, using the U.S. Army Corps of Engineers HEC-1 program, the water surface elevations in the vicinity of the houses have been compared. (Refer to Table 1, Appendix D). The facilities were overtopped in 1942 and 1955 by a maximum depth of about three feet, with no apparent structural damage. For this report, is was assumed that an overtopping of four feet depth would cause a breach of the dam. Calculations indicate that 39 percent of the PMF inflow would cause an overtopping of 4 feet. The increase due to overtopping under no failure condition as compared to no over-topping, would be 3.1 feet. While more property would be exposed to flooding, the increase to the hazard to loss of life is not considered significant. With failure, however, the breaching analysis indicates a rise of 5.7 feet above the flow level just prior to breach when consider-ing a 15 minute time to complete the breach and a 4.3 feet rise above flow level just prior to breach when considering a 1 hour time to com-plete the breach. The increase in hazard to loss of life and property damage is reflected not only in the increase in depth of water of 5.7 feet in the 15 minute breach and 4.3 feet in the 1 hour breach, but more significantly in the shorter time to reach the peak. Less time would be available to respond to the flooding under the breach conditions.

Being an earth embankment, it is judged that the breach would be completed between the 15 minute and the 1 hour period. The numerical difference of water levels is 1.4 feet. The property damage would be similar with either time of failure. Again, however, the time factor is most significant regarding loss of life. Calculations indicate that the water depth will increase at a rate of 5.7 feet in 15 minutes under the 15 minute breach condition.

Three dams are located upstream of Keen Lake Dam. For this evaluation, none of those dams were considered to have failed (See Appendix D, Sheet 11).

On the basis of these calculations, it is concluded that the hazard to loss of life and property damage is significantly increased when the dam is overtopped as compared to the condition just prior to overtopping.

Refer to Table 1, Appendix D, for comparison of flood water levels.

F.   Spillway Adequacy

        The intermediate size category and high hazard category, in
accordance with the Corps of Engineers criteria and guidelines, indi-
cates that the spillway design flood for this dam should be the Probable
Maximum Flood (PMF).

        Calculations show that the spillway discharge capacity and
reservoir storage capacity combine to handle 14% of the PMF (Refer to
Appendix D).

        Since the spillway discharge and reservoir storage capacity
cannot pass one-half of the PMF and because the downstream hazard to
loss of life is high and this hazard is significantly increased when the
dam fails as compared to just prior to failure, the spillway is judged
to be seriously inadequate.

        The hydrologic analysis for this investigation was based upon
existing conditions of the watershed. The effects of future development
were not considered.

SECTION 6 - STRUCTURAL STABILITY

6.1 EVALUATION OF STRUCTURAL STABILITY

A. Visual Observations

1. Embankment

The visual inspection of Keen Lake Dam did not find any major signs of distress which would signify an unstable structural condition. The upstream slope was flat. Although there is very little protective cover on the slope, the protection of the old upstream railroad embankment prevent serious wave damage. The upstream slope and the top of the embankment are covered with a considerable growth of trees, which could cause serious problems when the embankment is saturated.

The downstream side of the embankment is formed by a nearly vertical stone wall. The wall appears to be in good condition. Leakage is occurring on both sides of the spillway close to the bottom of the wall. Overtopping of the dam in 1942 and 1955 caused washouts at the abutments, but apparently did not endanger the stability of the structure.

2. Appurtenant Structures

The appurtenant structures are an integral part of the dam and consist of a stone spillway and adjacent sluiceway. The sluiceway is closed off with stoplogs from about 11 feet below spillway crest to slightly above the spillway crest. The stoplogs were replaced in 1978 and are in good condition. The walls of the spillway and sluiceway are in fair condition. The top and sides of the center wall are in need of repair to ensure structural integrity during large discharges.

B. Design and Construction

Design and Construction data are not available for review of structural stability.

C. Operating Records

Records in the files of PennDER indicate that the dam was overtopped at least twice in the last 40 years (1942 and 1955). The 1942 flood caused a washout at both abutments on the downstream side, but there is no indication that these washouts undermined the foundation of the dam. The washouts were backfilled. The flood of 1942 caused the failure of the stoplogs in the sluiceway. Other records indicate that leakage through the downstream wall has existed since at least 1930.

D.   Post Construction Changes

        The post construction changes have been limited to rehabilita-
tion of the floors in the spillway and sluiceway and attempting to
reduce the leakage through the walls under the spillway.

E.   Seismic Stability

        This dam is located in Seismic Zone 1 and it is considered
that the static stability is sufficient to withstand minor earthquake-
induced dynamic forces. No studies or calculations have been made to
confirm this assumption.

SECTION 7 - ASSESSMENT AND RECOMMENDATIONS

7.1 DAM ASSESSMENT

A. Safety

The visual inspection and the review of available information indicate that the dam and its appurtenant structures are in fair condition. Repairs are required to the masonry walls of the spillway and sluiceway and the trees and brush on the embankment should be removed. Leakage exists at the downstream wall of the dam. The water is clear at the present time. Close observation and monitoring of this emerging water is recommended.

In accordance with the Corps of Engineers evaluation guidelines, the spillway is inadequate for passing the full PMF peak inflow without overtopping the dam. The combination of the storage and spillway capacity is sufficient for passing only 14 percent of the PMF. Failure of the dam due to overtopping will significantly increase the hazard to loss of life downstream of the dam. The spillway capacity is seriously inadequate. The dam, therefore, is considered to be unsafe, non-emergency.

B. Adequacy of Information

Although the available engineering data are not sufficient to make a detailed analysis of the stability of the dam and its appurtenant structures, the available drawings, reports and the observed physical conditions are judged sufficient for making a reasonable assessment of the overall condition of the dam.

C. Urgency

The recommendations presented below should be implemented without delay.

D. Necessity for Additional Studies

A detailed hydrologic and hydraulic analysis should be performed by a professional engineer experienced in the design and construction of dams to determine means for improving the capacity of this spillway and reservoir system.

7.2 RECOMMENDATIONS

In order to assure the safe operation of this dam, the following recommendations are presented for implementation by the owner:

1. That a detailed hydrologic and hydraulic engineering analysis be made by a professional engineer with experience in the design and construction of dams to determine means for improving the capacity of the spillway and reservoir system.

2. That all trees and brush be removed from the embankment and that this work be performed on a regular maintenance schedule. The embankment should be protected with an adequate grass cover.

3. That the walls of the spillway and sluiceway be pointed and capped to insure its structural integrity.

4. That the leakage at the downstream wall be monitored on a regular basis noting and recording approximate volume and clarity. If increase in volume or any turbidity is observed, immediate steps shall be taken to identify and correct the condition.

5. That a formal surveillance and downstream warning system be developed to be used during periods of heavy or prolonged rainfall.

6. That a program be developed for regular inspection and maintenance of the facilities.

APPENDIX A

CHECKLIST OF VISUAL INSPECTION REPORT

CHECK LIST

PHASE I - VISUAL INSPECTION REPORT

PA DER # 64-13   NDI NO. PA-00 092

NAME OF DAM   KEEN LAKE DAM   HAZARD CATEGORY   High

TYPE OF DAM   Stone masonry gravity dam with upstream earthfill

LOCATION   Canaan   TOWNSHIP   Wayne   COUNTY, PENNSYLVANIA

INSPECTION DATE   10/23/79   WEATHER cloudy, windy TEMPERATURE 50-60

INSPECTORS: R.V. Houseal (Recorder)   OWNER'S REPRESENTATIVE(s):

             H. Jongsma   James Keen

             R. Shireman

             A.W. Bartlett

NORMAL POOL ELEVATION: 1272.0   AT TIME OF INSPECTION:

BREAST ELEVATION: 1277.5 (as surveyed)   POOL ELEVATION: 1272.1

SPILLWAY ELEVATION: 1272.0   TAILWATER ELEVATION:

MAXIMUM RECORDED POOL ELEVATION: (Est. 3 ft. over spillway 1942)

GENERAL COMMENTS:

   Dam appears to be in a stable condition. There is no evidence of
   tilting, settlement or other movement. The reservoir is used for
   recreational purposes.

A-1

VISUAL INSPECTION
EMBANKMENT

	OBSERVATIONS AND REMARKS	
A. SURFACE CRACKS	EMBANKMENT	MASONRY WALL
	N/A	Loose stone.
B. UNUSUAL MOVEMENT BEYOND TOE	N/A	None.
C. SLOUGHING OR EROSION OF EMBANKMENT OR ABUTMENT SLOPES	N/A	None.
D. ALIGNMENT OF CREST: HORIZONTAL: VERTICAL:	Horizontal – Okay Vertical – See Profile Plate A-II.	Good.
E. RIPRAP FAILURES	N/A	N/A
F. JUNCTION EMBANKMENT & ABUTMENT OR SPILLWAY	N/A	Both abutments have a concrete wall diverting overflow water away from the abutment fill.
G. SEEPAGE	N/A	See sketch. Close to groundline both sides of spillway.
H. DRAINS	N/A	None.
J. GAGES & RECORDER	None.	N/A
K. COVER (GROWTH)	Trees.	None. Trees close to wall.

A-2

VISUAL INSPECTION
OUTLET WORKS

	OBSERVATIONS AND REMARKS
A. INTAKE STRUCTURE	Stoplogs in sluiceway can lower reservoir to elevation 1261.7.
B. OUTLET STRUCTURE	N/A
C. OUTLET CHANNEL	Adjacent to spillway.
D. GATES	Stoplogs.
E. EMERGENCY GATE OUTLET	Emergency drawdown is provided by stoplogs to the left of the spillway in old sluiceway.
F. OPERATION & CONTROL	Stoplogs replaced in 1978.
G. BRIDGE (ACCESS)	None.

A-3

VISUAL INSPECTION
SPILLWAY

	OBSERVATIONS AND REMARKS
A. APPROACH CHANNEL	The flow to the spillway must pass through a stone arch which goes through a separate embankment. A small lake is formed between this embankment and the main dam. See plan A-I.

B. WEIR:
  Crest Condition
  Cracks
  Deterioration
  Foundation
  Abutments
	Broadcrested weir.
	Walls gunited (1933) now spalled, cracked and broken.
	Vertical drop to plunge pool.
	Abutment walls need repair.

C. DISCHARGE CHANNEL:
  Lining
  Cracks
  Stilling Basin
	Natural mountain stream below plunge pool.
	Wooded overbanks - rock channel bottom.

D. BRIDGE & PIERS	None.
E. GATES & OPERATION EQUIPMENT	Stop logs in sluiceway adjacent to spillway.
F. CONTROL & HISTORY	Dam overtopped in 1942 and 1955.

VISUAL INSPECTION

	OBSERVATIONS AND REMARKS
INSTRUMENTATION	
Monumentation	None.
Observation Wells	None.
Weirs	None.
Piezometers	None.
Staff Gauge	None.
Other	None.
RESERVOIR Slopes	Stable, flat, partially wooded.
Sedimentation	None reported.
Watershed Description	Mostly cultivated land with some marshland and woodland.
DOWNSTREAM CHANNEL Condition	Floodplain of channel 100'± wide steep side slopes on right – moderate 4:1 – 3:1 on left side near dam.
Slopes	Wooded slopes 8" – 12" trees some evergreens – downstream widens in vicinity of homes.
Approximate Population	20±
No. Homes	6 homes in flood plain within 1/2 mile of dam.

Hill

Highway

Trees

Leaks

Stoplogs

Deteriorated Wall

Flow → Spillway

Arch Opening — Keen Lake

Camp Sites

Leaks

Flowline

Trees

Abandoned Railroad Embankment

Flow ↑

Keen Lake

SCHEMATIC PLAN

Surveyed 10-23-79

KEEN LAKE DAM

PA.-00092

INSPECTION SURVEY

PLATE A-I

EMBANKMENT PROFILE

Angle between ℄ Dam + ℄ R = 87° Left

Low Point

Weir Spillway

Stoplog slot
Stoplogs to El. 1272.7±

Highway

1286.1
1283.4
1280.6
1279.2
1278.8
1277.5
1272.
1272.
1272.7
1272.7
1277.6
1277.8
1278.4
1278.7

1277.7

0+00
0+50
1+00
1+50
2+00
2+50

1286
1282
1278
1274
1270
Left

Right

KEEN LAKE DAM
PA.-00092
INSPECTION SURVEY
PLATE A-II

PLAN - SPILLWAY

Crest

25'-0"

Approach

1271.15
1272.0

Flow

1271.63
26'-0"

Vertical Drop

1277.0

1280

2.83

W.S.

1278.6

1278.9

1

1260

1272.2

1254.5

1240

0   20   40   60   80
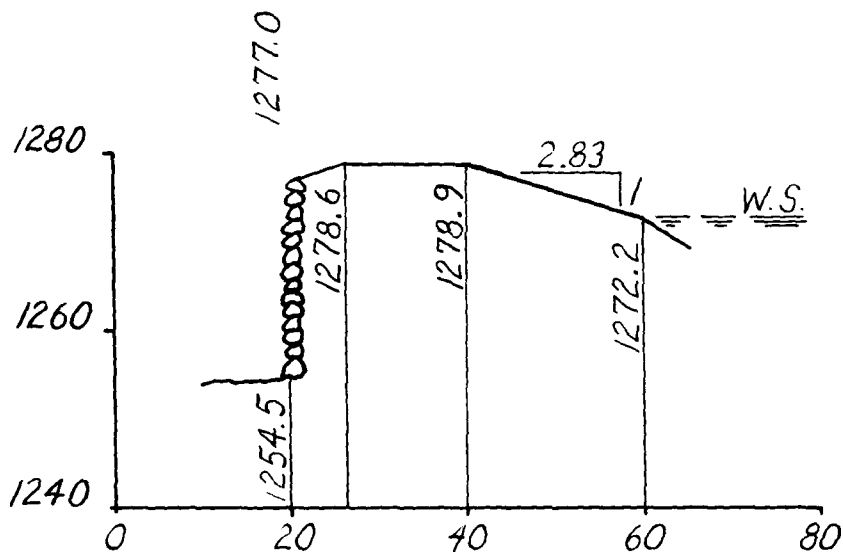
EMBANKMENT SECTION
STA.0+80

KEEN LAKE DAM
PA.-00092
INSPECTION SURVEY
PLATE A-III

PROFILE - R.R. FILL UPSTREAM FROM DAM

Surveyed 10-??-79

Station	Elevation
0+00	1286.1
0+50	1284.6
1+00	
	W.S. 1272.2
	℄ of R.R. Arch
1+50	1283.4
2+00	1278.9
2+50	1277.0
3+00	1276.7
3+50	1277.6
4+00	1278.6
	1280.5

1284
1280
1276
1272
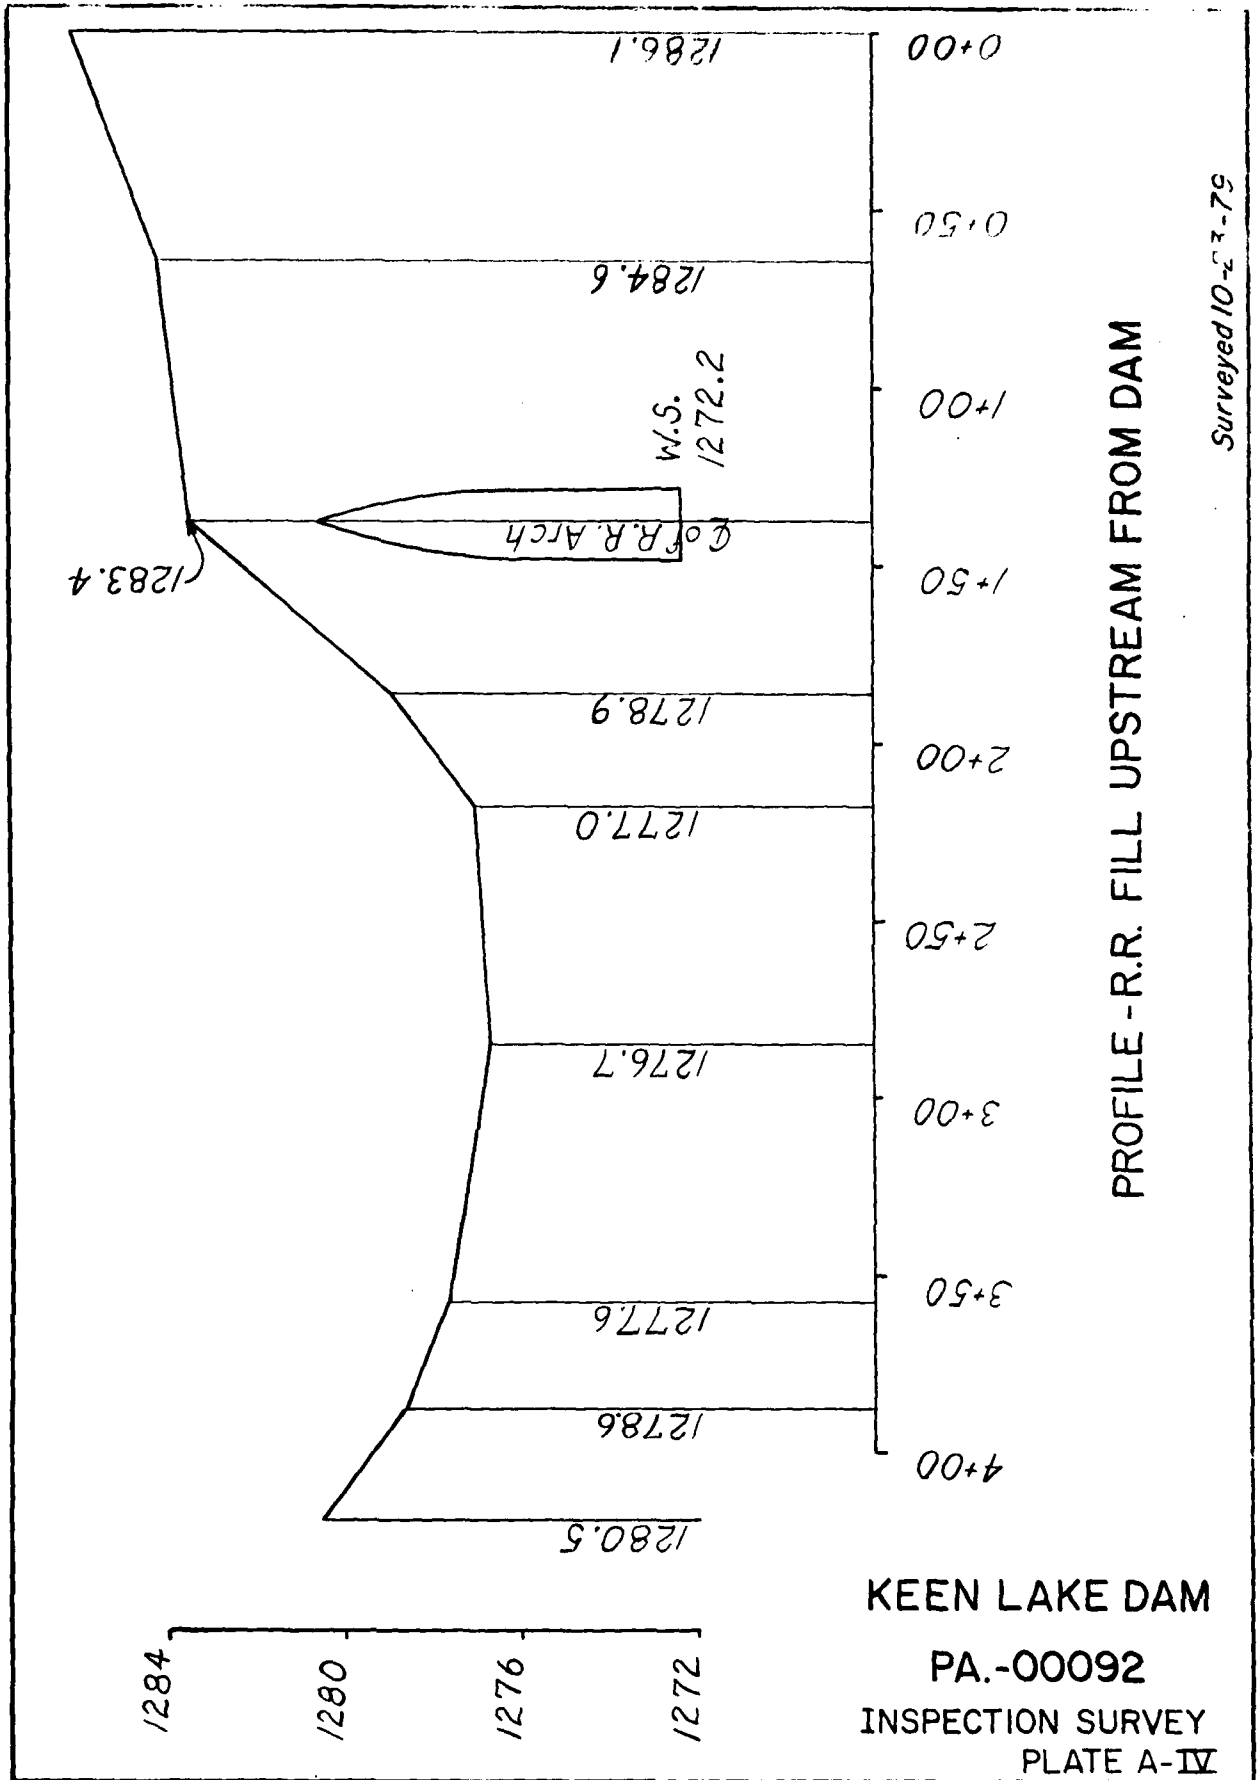
KEEN LAKE DAM
PA.-00092
INSPECTION SURVEY
PLATE A-IV
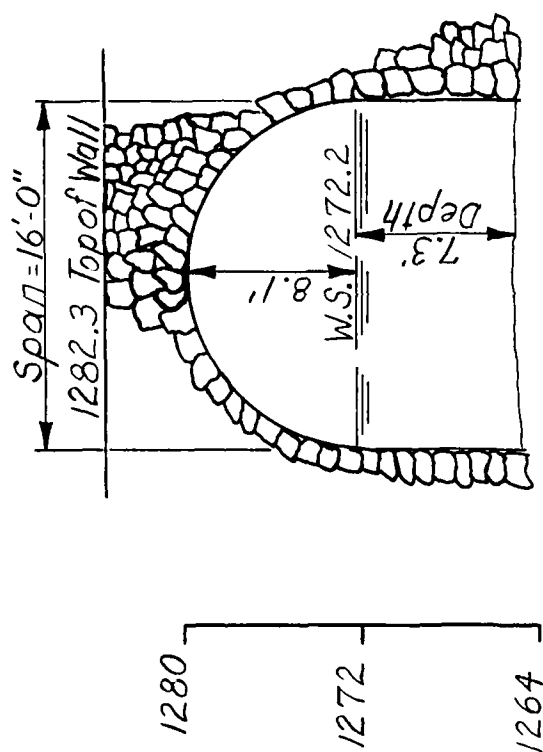
CROSS SECTION MASONRY ARCH

RAILROAD CULVERT

Span=16'-0"

1282.3 Top of Wall

W.S. 1272.2

8.1'

7.3' Depth

1280

1272

1264

KEEN LAKE DAM

PA.-00092

INSPECTION SURVEY

PLATE A-$\overline{\text{V}}$

APPENDIX B

CHECKLIST OF ENGINEERING DATA

PA DER # 64-13   NDI NO. PA-00092

NAME OF DAM KEEN LAKE DAM

ITEM	REMARKS
AS-BUILT DRAWINGS	Not available.
REGIONAL VICINITY MAP	U.S.G.S. Quadrangle Honesdale, Pa. See Plate II, Appendix E
CONSTRUCTION HISTORY	Built around 1850.
GENERAL PLAN OF DAM	See Plate III, Appendix E.
TYPICAL SECTIONS OF DAM	Not available.

OUTLETS:
  PLAN
  DETAILS
  CONSTRAINTS
  DISCHARGE RATINGS
	See Plate III, Appendix E.
	
	Not available.
	Not available.

ENGINEERING DATA

ITEM	REMARKS
RAINFALL & RESERVOIR RECORDS	Reported at Forest City 4.4 inches, Pleasant Mount 4.03 inches on May 22, 1942.
DESIGN REPORTS	None available.
GEOLOGY REPORTS	None available.
DESIGN COMPUTATIONS: HYDROLOGY & HYDRAULICS DAM STABILITY SEEPAGE STUDIES	None available.
MATERIALS INVESTIGATIONS: BORING RECORDS LABORATORY FIELD	None available.
POST CONSTRUCTION SURVEYS OF DAM	See Plate III, Appendix E.
BORROW SOURCES	Unknown.

ENGINEERING DATA

ITEM	REMARKS
MONITORING SYSTEMS	None.
MODIFICATIONS	None.
HIGH POOL RECORDS	2.5 feet overtopped May 1942. About 3 feet overtopped August 18, 1955, Hurricane Diane.
POST CONSTRUCTION ENGINEERING STUDIES & REPORTS	No engineering reports or studies.

PRIOR ACCIDENTS OR
FAILURE OF DAM
 	
    Description:
 	
    Reports:
	
	Stoplogs failed on May 24, 1942.
	    No reports.

MAINTENANCE & OPERATION RECORDS	Not maintained.
SPILLWAY PLAN, SECTIONS AND DETAILS	General Plan only. No details.

ENGINEERING DATA

ITEM	REMARKS
OPERATING EQUIPMENT, PLANS & DETAILS	None.
CONSTRUCTION RECORDS	Not available.
PREVIOUS INSPECTION REPORTS & DEFICIENCIES	PennDER Inspection Reports since 1930 indicate brush and trees on the embankment and on downstream wall. Leakage has been reported through sluiceway walls and at the bottom of the downstream wall.
MISCELLANEOUS	

CHECK LIST
HYDROLOGIC AND HYDRAULIC
ENGINEERING DATA

DRAINAGE AREA CHARACTERISTICS: 35% woodland, 60% farmland, 5% urban

ELEVATION:

TOP NORMAL POOL & STORAGE CAPACITY: Elev. 1272   Acre-Feet 887

TOP FLOOD CONTROL POOL & STORAGE CAPACITY: Elev. 1277.5   Acre-Feet 1449

MAXIMUM DESIGN POOL: Elev. 1277.5

TOP DAM: Elev. 1277.5

SPILLWAY:

  a. Elevation 1272

  b. Type Broad crested weir with sloping crest

  c. Width 26'

  d. Length 25'

  e. Location Spillover Near center of dam

  f. Number and Type of Gates None

OUTLET WORKS:

  a. Type None

  b. Location

  c. Entrance inverts

  d. Exit inverts

  e. Emergency drawdown facilities

HYDROMETEOROLOGICAL GAGES:

  a. Type None

  b. Location

  c. Records

MAXIMUM NON-DAMAGING DISCHARGE: 1252 cfs

APPENDIX C

PHOTOGRAPHS

Flow →

KEEN LAKE DAM

PA.-00092

KEY MAP OF PHOTOGRAPHS

PLATE C-I

Surveyed 10-23-79
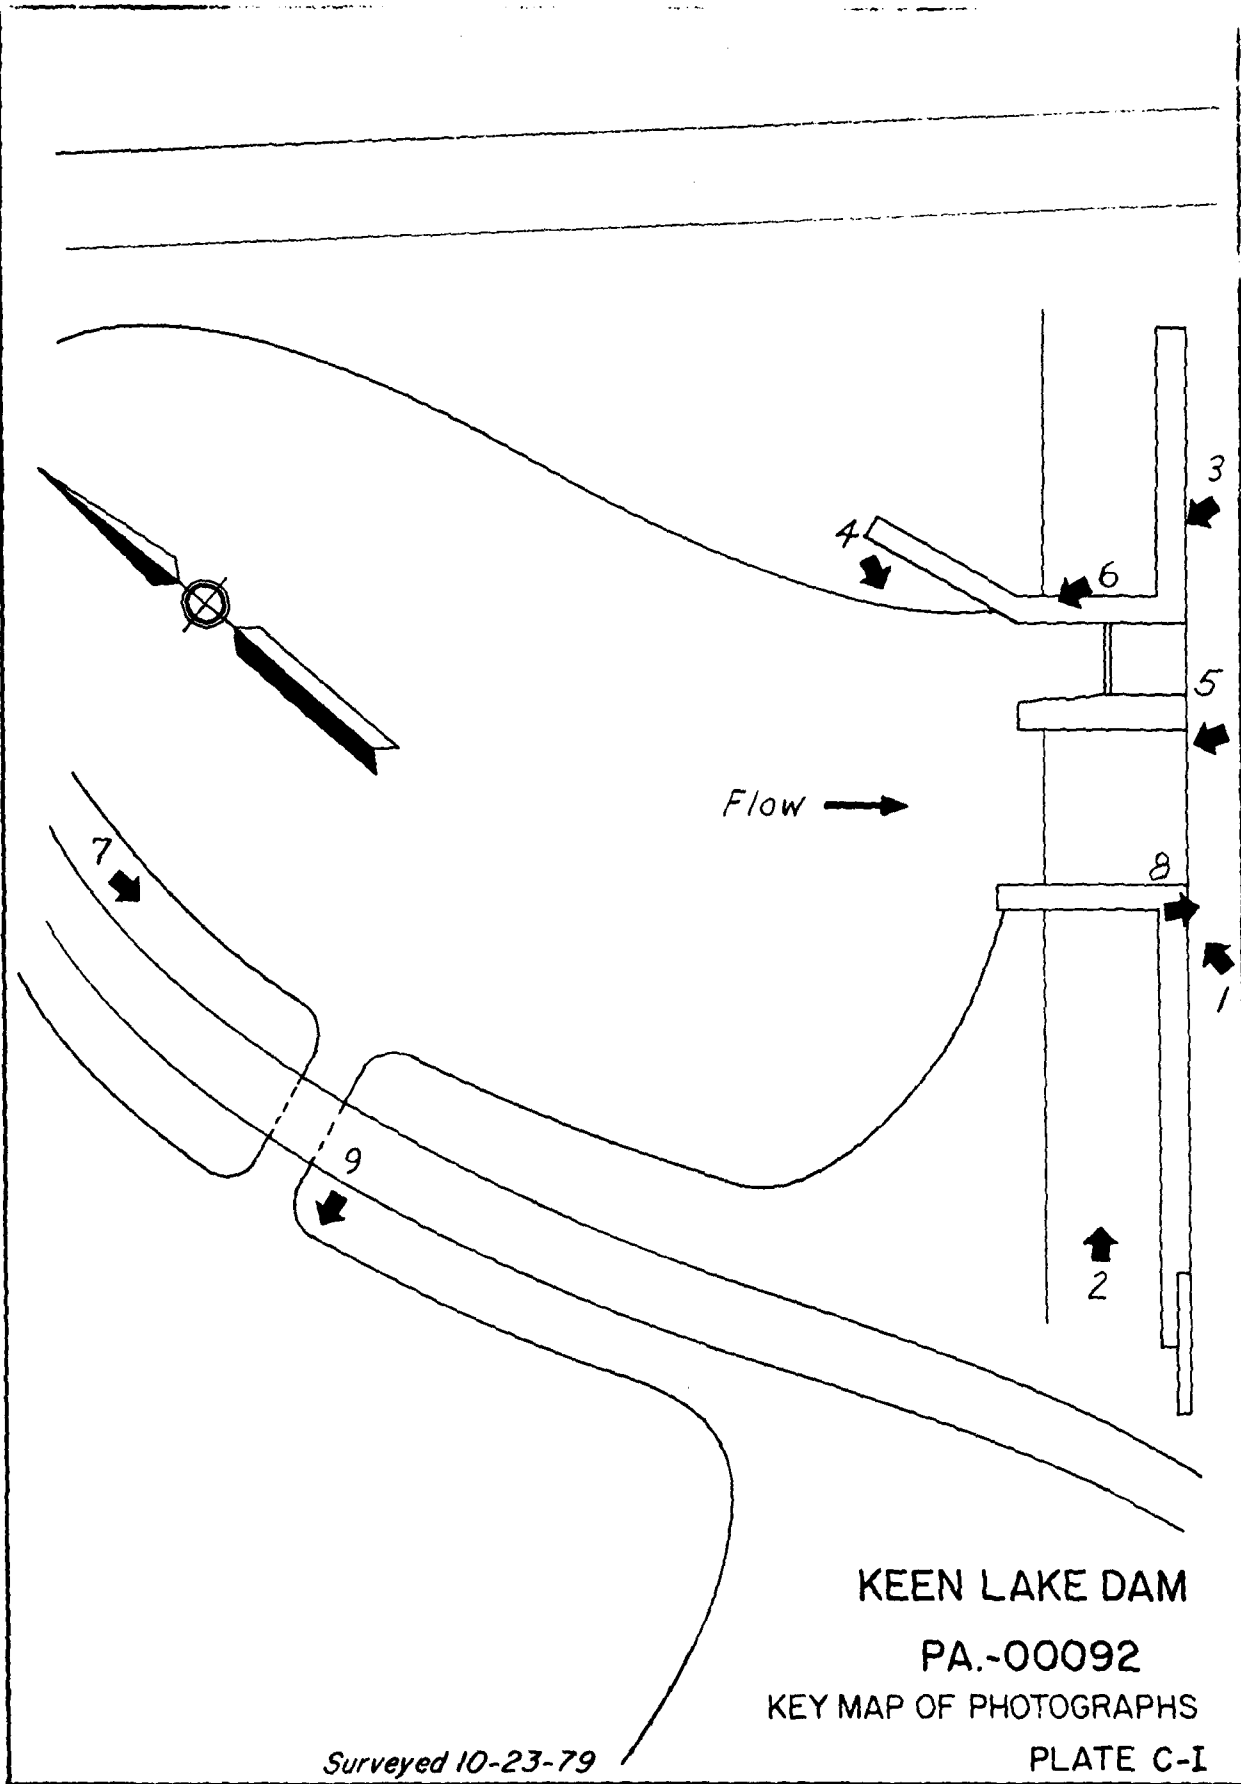
TOP OF EMBANKMENT LOOKING TO THE LEFT END - NO. 2

SEEPAGE AT DOWNSTREAM FACE - NO. 3

PA-00092
Plate C-II
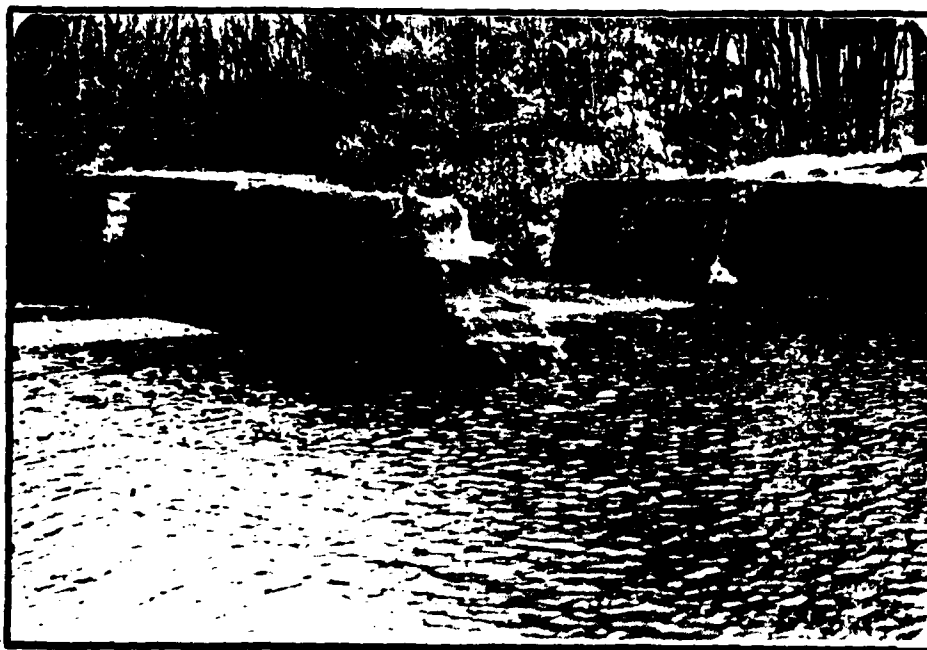
UPSTREAM SLUICEWAY AND SPILLWAY - NO. 4

DOWNSTREAM ELEVATION OF SPILLWAY AND SLUICEWAY - NO. 5

PA-00092
Plate C-III

THE UPSTREAM EMBANKMENT WITH ARCH - NO. 6

LOOKING TO UPSTREAM SLOPE - NO. 7

PA-00092

Plate C-IV

DOWNSTREAM CHANNEL - NO. 8

RESERVOIR - NO. 9

PA-00092
Plate C-V

APPENDIX D

HYDROLOGY AND HYDRAULIC CALCULATIONS

SUMMARY DESCRIPTION
OF
FLOOD HYDROGRAPH PACKAGE (HEC-1)
DAM SAFETY VERSION

The hydrologic and hydraulic evaluation for this inspection report has employed computer techniques using the Corps of Engineers computer program identified as the Flood Hydrograph Package (HEC-1) Dam Safety Version.

The program has been designed to enable the user to perform two basic types of hydrologic analyses: (1) the evaluation of the overtopping potential of the dam, and (2) the capability to estimate the downstream hydrologic-hydraulic consequences resulting from assumed structural failures of the dam. A brief summary of the computation procedures typically used in the dam overtopping analysis is shown below.

- Development of an inflow hydrograph to the reservoir.

- Routing of the inflow hydrograph(s) through the reservoir to determine if the event(s) analyzed would overtop the dam.

- Routing of the outflow hydrograph(s) of the reservoir to desired downstream locations. The results provide the peak discharge and maximum stage of each routed hydrograph at the outlet of the reach.

The output data provided by this program permits the comparison of downstream conditions just prior to a breach failure with that after a breach failure and the determination as to whether or not there is a significant increase in the hazard to loss of life as a result of such a failure.

The results of the studies conducted for this report are presented in Section 5.

For detailed information regarding this program refer to the Users Manual for the Flood Hydrograph Package (HEC-1) Dam Safety Version prepared by the Hydrologic Engineering Center, U.S. Army Corps of Engineers, Davis, California.

SPILLWAY RATING

1272
SPILLWAY CREST

.85

S = .013

25'

C = 2.9 (ESTIMATED FROM KING'S HDBK.)

1272.7
TOP OF STOPLOGS

1261.7

STOP LOGS

C = 3.32 (KING'S HDBK.)

1277.5
TOP OF DAM
LOW POINT

8'

5'

26'

TOP OF
STOP LOGS
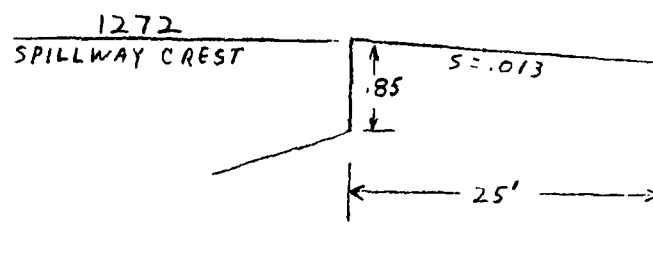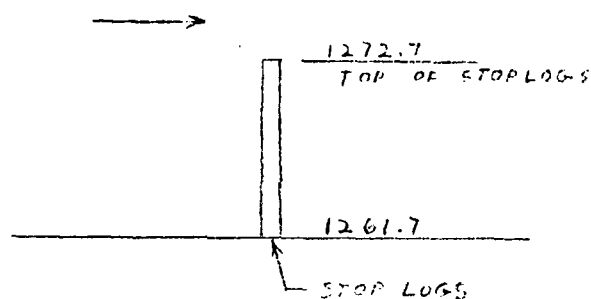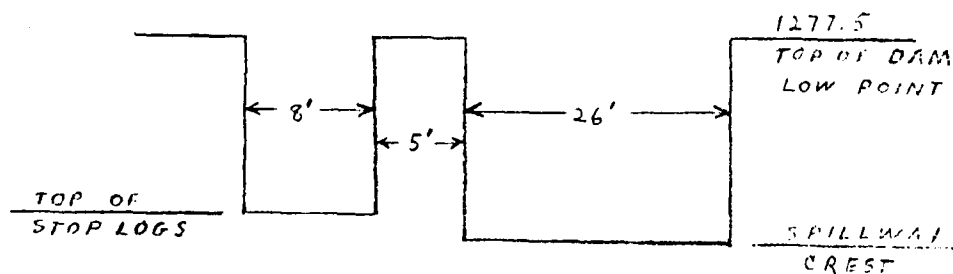
SPILLWAY
CREST

SPILLWAY RATING

$$Q = C L H^{3/2}$$

$C = 2.9$

$L = 26'$

$H = 1277.5 - 1272 = 5.5'$

$$Q = 2.9 \times 26 \times (5.5)^{1.5} = 973 \; CFS$$

STOP LOG DISCHARGE

$$Q = C L H^{3/2}$$

$C = 3.32$

$L = 8'$

$H = 1277.5 - 1272.7 = 4.8'$

$$Q = 3.32 \times 8 \times (4.8)^{1.5} = 279 \; CFS$$

ESTIMATE OF MAXIMUM DISCHARGE

THE MAXIMUM KNOWN FLOOD AT KEEN POND OCCURRED
IN MAY 1942. THIS FLOOD OVERTOPPED THE DAM.
THE REPORTED AMOUNT OF OVERTOPPING RANGED FROM
4 INCHES TO 3 FEET.

   AT NEARBY LACKAWANNA RIVER GAGE SITE NEAR
FOREST CITY THE MAY 1942 DISCHARGE WAS 2530 CFS
D.A. LACKAWANNA RIVER = 38.8 SQ. MI.
D.A. KEEN POND = 14.53 SQ. MI.

$$Q \; AT \; KEEN \; POND = (14.53/38.8)^{.8} \times 2530 = 1153 \; CFS$$

SPILLWAY RATING CURVE

TOP OF DAM
LOW POINT

ELEV.

DISCHARGE - CFS
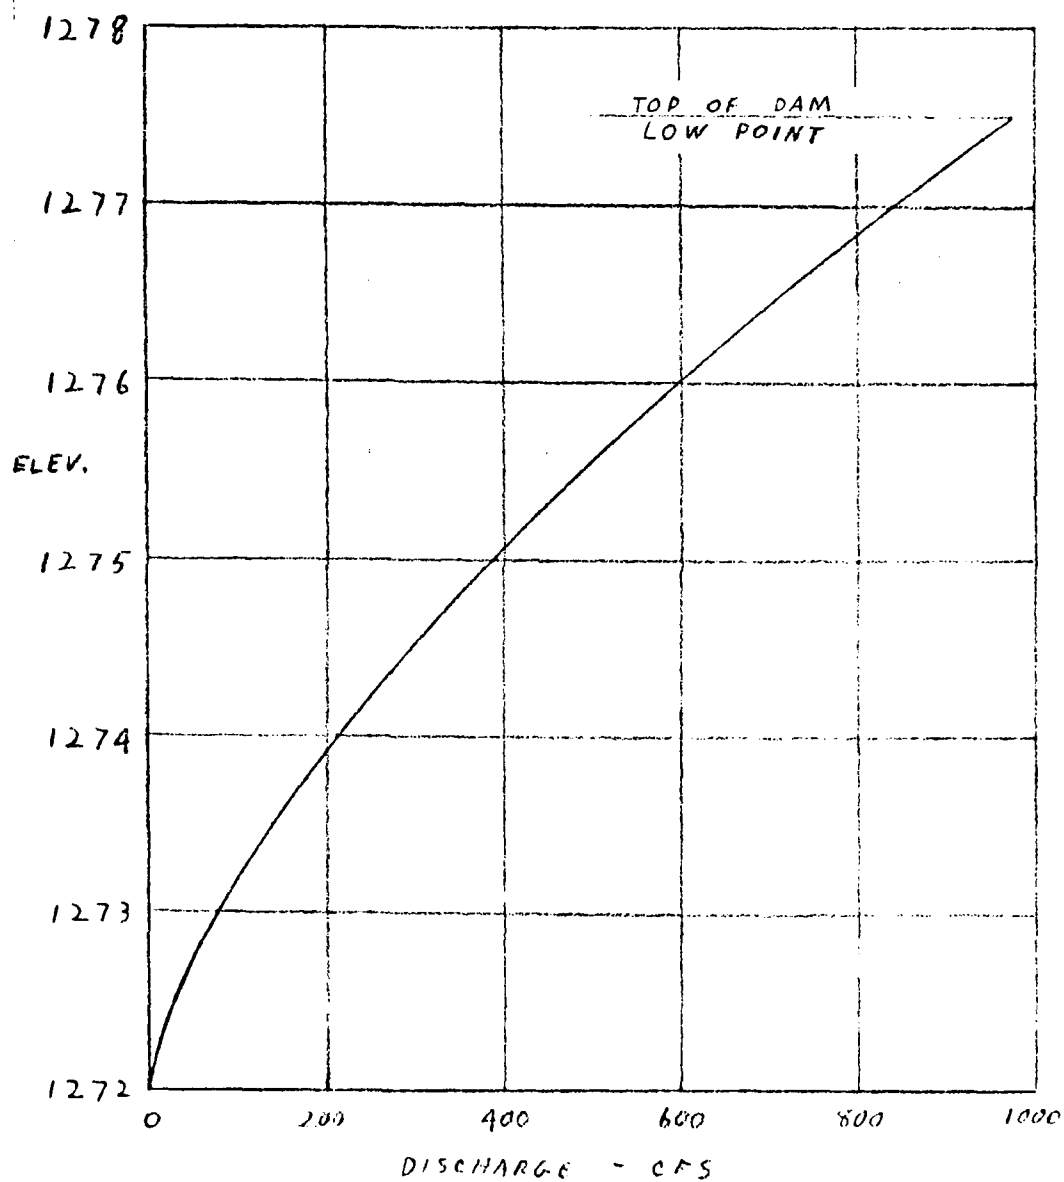
EMBANKMENT RATING

$$Q = C L H^{1.5}$$

AT ELEV. 1278

$2.7 \times 5 \times (.3)^{1.5} = 2$

$2.7 \times 27 \times (.3)^{1.5} = 12$

$2.7 \times 12 \times (.1)^{1.5} = 1$

$2.7 \times 4 \times (.25)^{1.5} = 2$ $\Sigma = 17$ CFS

AT ELEV 1278.3

$2.7 \times 5 \times (.6)^{1.5} = 6$

$2.7 \times 27 \times (.6)^{1.5} = 34$

$2.7 \times 29 \times (.25)^{1.5} = 10$

$2.7 \times 6 \times (.4)^{1.5} = 4$ $\Sigma = 54$ CFS

AT ELEV 1278.7

$2.7 \times 5 \times (1)^{1.5} = 14$

$2.7 \times 27 \times (1)^{1.5} = 73$

$2.7 \times 35 \times (.6)^{1.5} = 44$

$2.7 \times 20 \times (.15)^{1.5} = 3$

$2.7 \times 9 \times (.6)^{1.5} = 11$ $\Sigma = 145$ CFS

AT ELEV 1279.3

$2.7 \times 5 \times (1.6)^{1.5} = 27$

$2.7 \times 27 \times (1.6)^{1.5} = 148$

$2.7 \times 35 \times (1.2)^{1.5} = 124$

$2.7 \times 20 \times (.75)^{1.5} = 35$

$2.7 \times 10 \times (1.15)^{1.5} = 33$

$2.7 \times 45 \times (.3)^{1.5} = 20$ $\Sigma = 387$ CFS

AT ELEV 1284

$2.7 \times 5 \times (6.3)^{1.5} = 213$

$2.7 \times 27 \times (6.3)^{1.5} = 1153$

$2.7 \times 35 \times (5.9)^{1.5} = 1354$

$2.7 \times 20 \times (5.45)^{1.5} = 687$

$2.7 \times 10 \times (5.85)^{1.5} = 382$

$2.7 \times 45 \times (5)^{1.5} = 1359$

$2.7 \times 25 \times (4.1)^{1.5} = 560$ $\Sigma = 5700$

DISCHARGE RATING CURVE

DISCHARGE — 1000 CFS
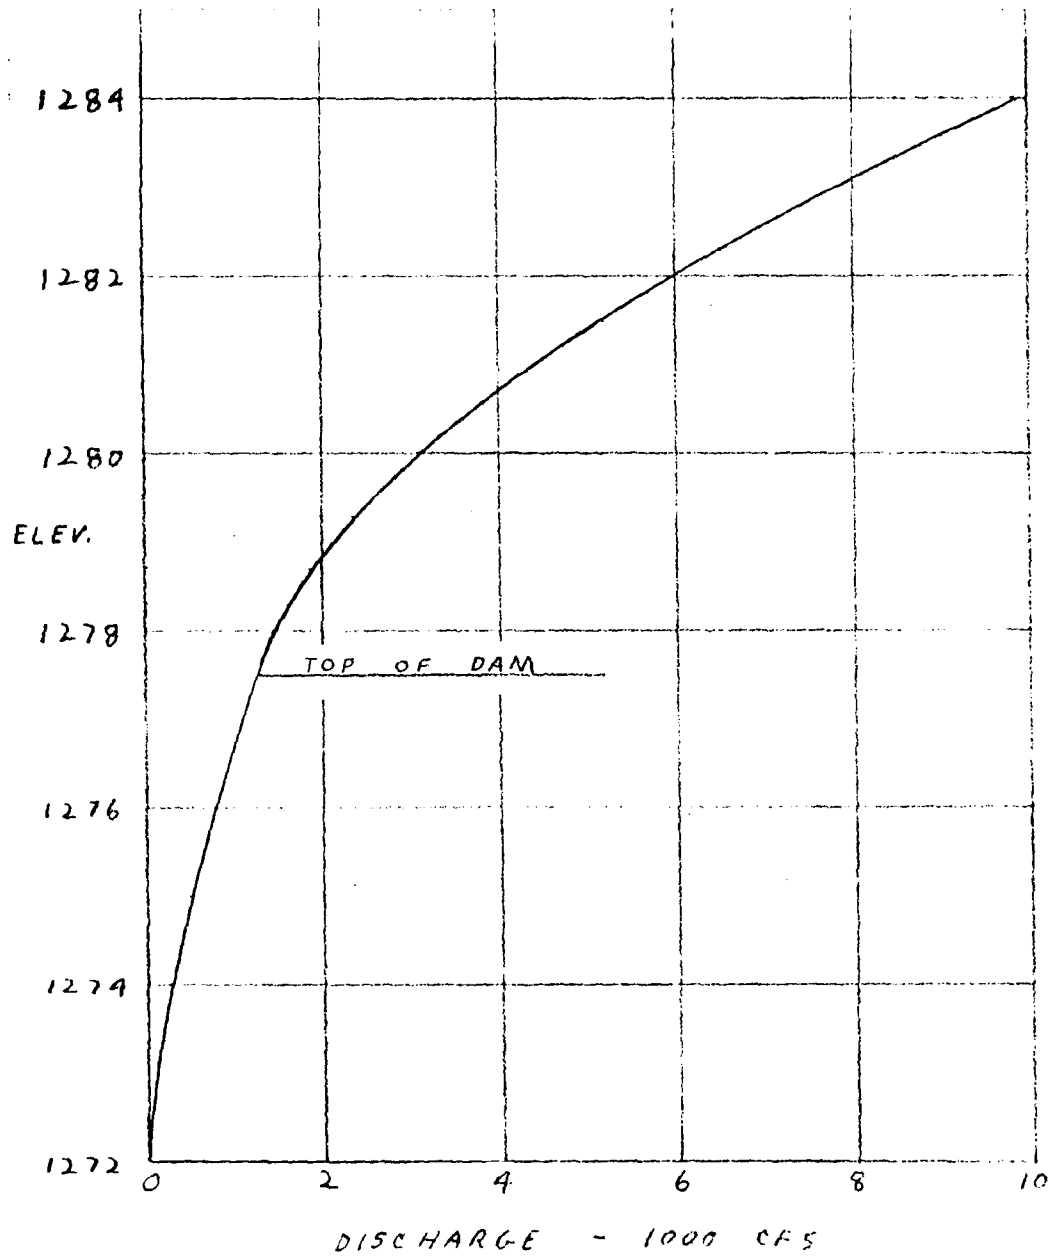
UPSTREAM RESERVOIR

ELK LAKE — ORIGINALLY NATURAL LAKE BU
NOW 12' HIGH DAM CONSTRUCTED
ACROSS OUTLET.
LENGTH OF DAM = APPROX. 200'

SPILLWAY RATING

BROAD CRESTED WEIR $C = 2.7$ (ESTIMATED FROM KING'S HDBK.)

EMBANKMENT $C = 2.7$ (KING'S HDBK.)

FOOT BRIDGE   TOP OF DAM

```
           5.85'
      |<--------->|
  5.9 |           |
      |   4.6     | 2.6
      |<------>|  |
 1417
SPILLWAY CREST
```
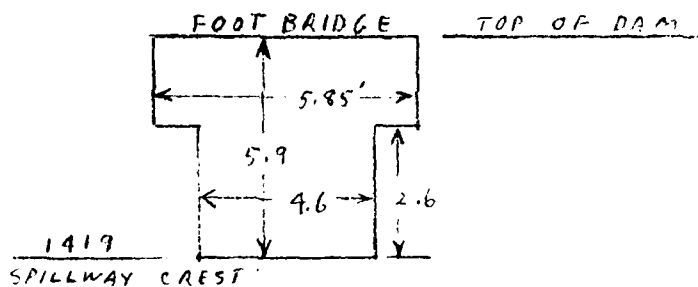
$$Q = C L_1 H_1^{3/2} + C L_2 H_2^{3/2}$$

$$= 2.7 \times 4.6 \times (5.9)^{3/2} + 2.7 \times 1.25 \times (2.?)^{3/2}$$

$$= 198 \ CFS$$

UPSTREAM RESERVOIR

LITTLE KEEN POND   12' HIGH DAM

SPILLWAY RATING

BROADCRESTED WEIR $C = 2.7$ (ESTIMATED FROM KING'S HDBK.)

EMBANKMENT $C = 2.7$ (KING'S HDBK.)
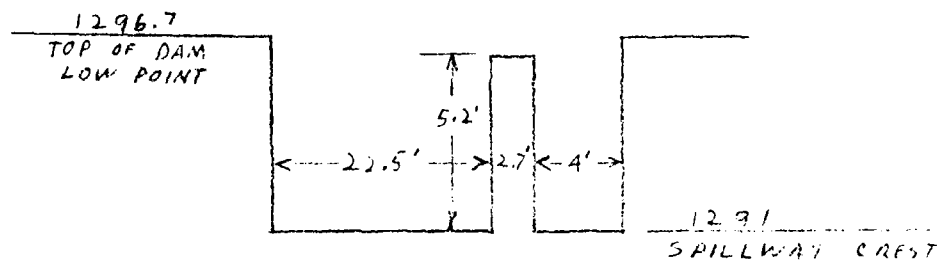
$$Q = C L H^{3/2}$$

$$= 2.7 \times (22.5 + 4) \times (5.2)^{1.5}$$

$$= 848 \; cfs$$

UPSTREAM RESERVOIR

     LAKE LA DORE   28' HIGH DAM

SPILLWAY RATING

    BROADCRESTED WEIR $c = 2.9$ (ESTIMATED FROM KING'S HDBK.)
        WITH INCLINED CREST

    SLOPED SIDE OF WEIR WITH BRUSH   USE $c = 2.6$

    EMBANKMENT $c = 2.7$ (KING'S HDBK.)
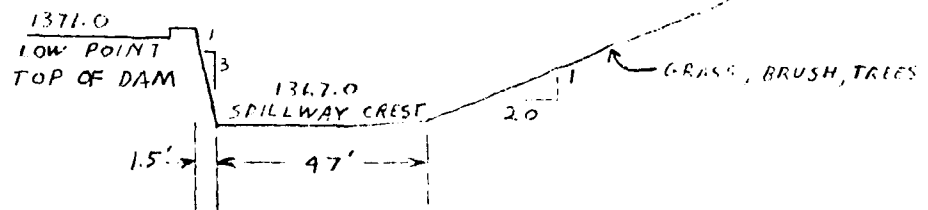
$$Q = c_1 L_1 H_1^{3/2} + c_2 L_2 H_2^{3/2}$$

$c_1 = 2.9$ $c_2 = 2.6$

$H_1 = 1371 - 1367 = 4'$ $H_2 = (1371 - 1367)/2 = 2'$

$L_1 = 47 + (4/3)/2 = 47.7'$ $L_2 = 4 \times 20 = 80'$

$Q = 2.9 \times 47.7 \times (4)^{1.5} + 2.6 \times 80 \times (2)^{1.5}$

   $= 1106 + 588$

   $= 1694$ CFS

BY RLS DATE 12/19/79   **BERGER ASSOCIATES**   SHEET NO.   OF
CHKD. BY DATE   PROJECT
SUBJECT   KEEN LAKE

SIZE CLASSIFICATION

     MAXIMUM STORAGE

MAXIMUM HEIGHT = 26 FEET

     SIZE CLASSIFICATION IS "INTERMEDIATE"

HAZARD CLASSIFICATION

     SEVERAL HOUSES ARE LOCATED NEAR THE
     DOWNSTREAM CHANNEL

         USE "HIGH"

RECOMMENDED SPILLWAY DESIGN FLOOD

     THE ABOVE CLASSIFICATIONS INDICATE USE
     OF AN SDF EQUAL TO THE PROBABLE
     MAXIMUM FLOOD.

SPILLWAY   CAPACITY   CURVE

ELEV.

TOP OF DAM

14 % OF PMF

% OF PMF
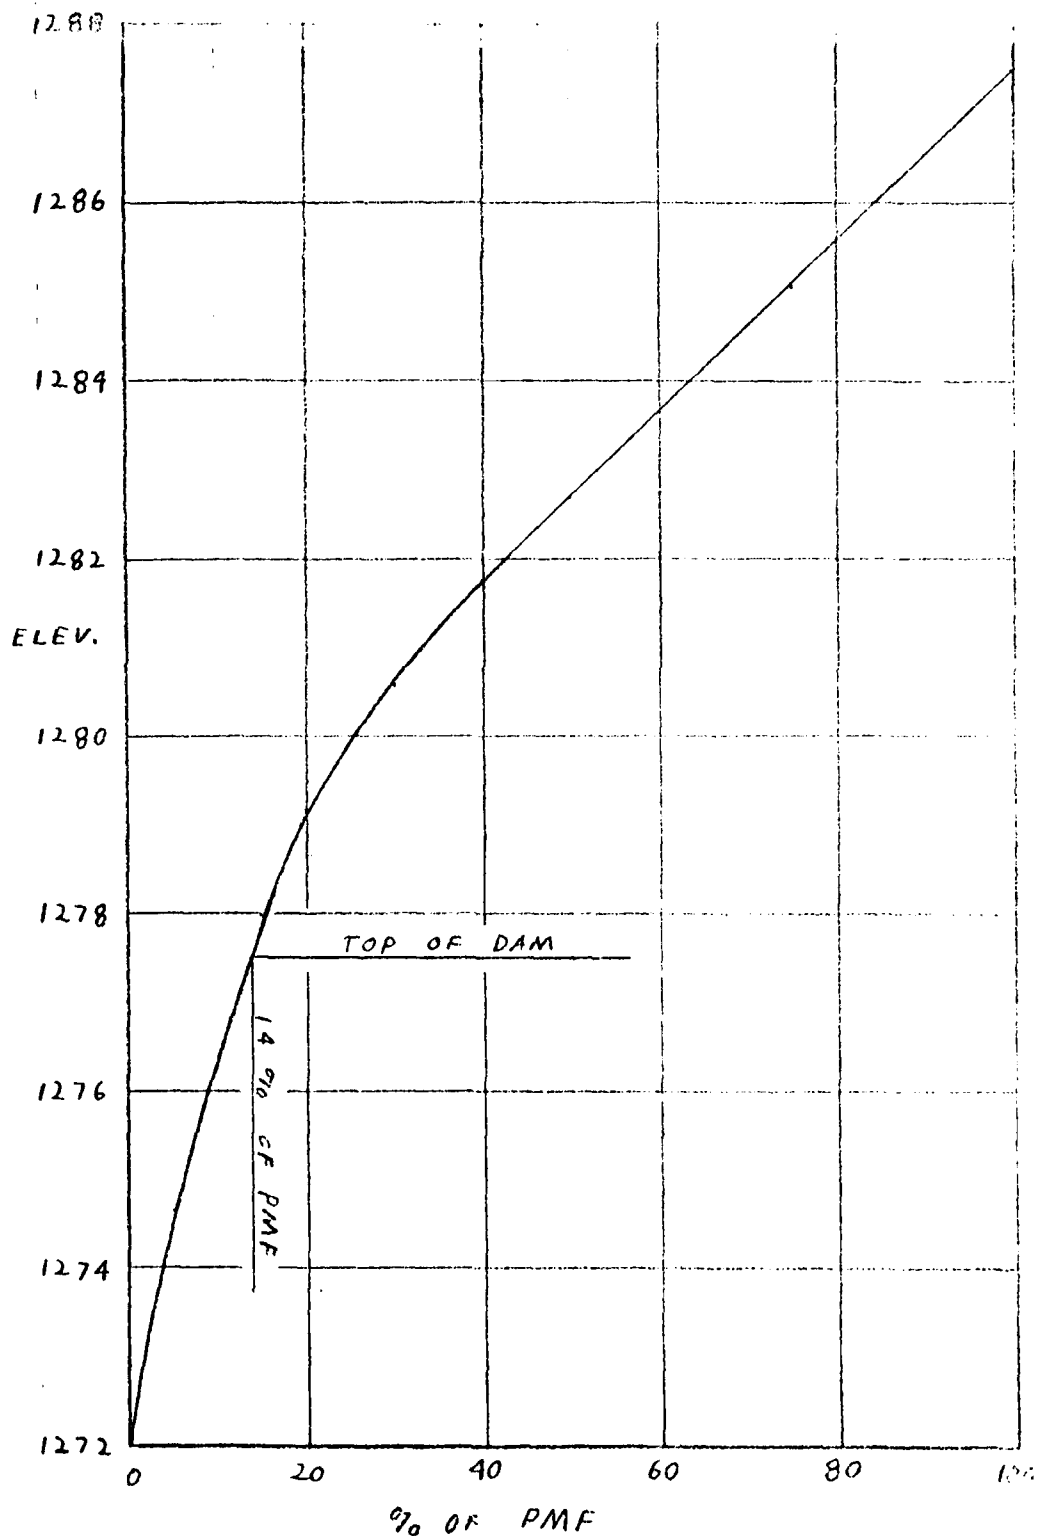
BY RLS DATE 1/18/80   **BERGER ASSOCIATES**   SHEET NO. 6?
CHKD. BY____ DATE_____   PROJECT ____
SUBJECT _____ KEEN LAKE

BREACH ASSUMPTIONS

BREACH WIDTH = 50'

SIDE SLOPES (EARTH EMBANKMENT) = 1:1

FAILURE TIME (EARTH EMBANKMENT) =
         BETWEEN 15 MIN. AND 2 HR.
         USE: .25 HR., .5 HR., 1.0 HR.

POOL LEVEL AT FAILURE :   EARTH EMBANKMENT
                          PREVIOUSLY OVERTOPPED
                          BY ABOUT THREE FEET.
                          ESTIMATE ONE ADDITIONAL
                          FOOT OF OVERTOPPING WILL
                          CAUSE FAILURE.
                          USE 4.0 FT OVER TOP OF DAM

UPSTREAM DAMS:
         ELK LAKE = NOT OVERTOPPED
         LAKE LADORE = NOT OVERTOPPED BY 39% PMF
         LITTLE KEEN POND = OVERTOPPED 3.25' BY 39%
                         PMF. ESTIMATE PAST FLOODS
                         OVERTOPPED BY ABOUT 3'
                         WITHOUT FAILURE. ONE ADDITIONAL
                         FOOT OF OVERTOPPING WILL
                         CAUSE FAILURE.
     ∴ UPSTREAM DAMS WILL NOT FAIL DUE
        TO OVERTOPPING PRIOR TO BREACH OF
        KEEN LAKE DAM

TABLE NO. 1

COMPARISON OF WATER SURFACE ELEVATIONS

KEEN LAKE DAM

PMF = 17,056 cfs

Crest Elevation - 1277.5   Low Point - 1277.5   Spillway Elevation - 1272

STAGE	CREST OF DAM ELEVATION	DEPTH	1850' D/S OF DAM* ELEVATION
A. At Low Point in Embankment Crest	1277.5	0	1240.9
B. 39% PMF Overtopping No Breach	1281.64	4.14	1244.0
C. 39% PMF Overtopping (15 Min. Breach)	1281.51	4.01	1249.7
D. 39% PMF Overtopping (1 Hour Breach)	1281.51	4.01	1248.3

*Several houses located about 1850 feet downstream of Keen Lake Dam.

Condition C: (Time refers to elapsed time after start of storm).
Time to reach breach elevation 1281.5 at dam = 45.0
Hours. Water level 1850' downstream prior to breach
= 1244.0. Duration of breach = 15 Minutes.
Time for breach to peak 1850' downstream = .25 Hours.
Peak elevation 1850' downstream due to breach = 1249.7.
Rate of increase in water level = 5.7' in 15 Minutes.

HYDROLOGY AND HYDRAULIC ANALYSIS
DATA BASE

NAME OF DAM: _____ KEEN LAKE _____ RIVER BASIN: DELAWARE

PROBABLE MAXIMUM PRECIPITATION (PMP) = _____ 21.3 _____ INCHES/24 HOURS[1]

(FOR FOOTNOTES SEE NEXT PAGE)

STATION		1	2	3	4
STATION DESCRIPTION		Elk Lake	Elk Lake Dam	Little Keen Pond	Little Keen Pond Dam
DRAINAGE AREA (SQUARE MILES)		.89		9.36	
CUMULATIVE DRAINAGE AREA (SQUARE MILE)		.89	.89	10.25	10.25
ADJUSTMENT OF PMP FOR DRAINAGE AREA (%)[2]	6 HOURS	111		111	
	12 HOURS	123		123	
	24 HOURS	133		133	
	48 HOURS	142		142	
	72 HOURS	–		–	
SNYDER HYDROGRAPH PARAMETERS	ZONE[3]	1		1	
	C_p / C_t [4]	.45/1.23		.45/1.23	
	L (MILES)[5]			6.01	
	L_{ca} (MILES)[5]	L'=.71[9]		3.98	
	$T_p = C_t (L \cdot L_{ca})^{0.3}$ (hours)	1.0[10]		3.19	
SPILLWAY DATA	CREST LENGTH (FT.)		4.6		26
	FREEBOARD (FT.)		5.9		5.7
	DISCHARGE COEFFICIENT		2.7		2.7
	EXPONENT		1.5		1.5
	ELEVATION		1419		1291
AREA (ACRES)[6]	NORMAL POOL		157		19.6
	ELEV. 1420		188.7	Elev. 1300	179.5
	ELEV. 1440		266.8	Elev. 1320	509
STORAGE (ACRE-FEET)	NORMAL POOL[7]		2922		92
	ELEV. 1363.2 [8]		0	Elev. 1276.9	0
	ELEV. _____ [8]				
	ELEV _____ [8]				

NAME OF DAM: _____KEEN LAKE_____ RIVER BASIN: _____DELAWARE_____

PROBABLE MAXIMUM PRECIPITATION (PMP) = _____21.3_____ INCHES/24 HOURS[1]

(FOR FOOTNOTES SEE NEXT PAGE)

STATION	1	2	3	4
STATION DESCRIPTION	Lake Ladore	Lake Ladore Dam	Keen Lake	Keen Lake Dam
DRAINAGE AREA (SQUARE MILES)	3.37		.91	
CUMULATIVE DRAINAGE AREA (SQUARE MILE)	3.37	3.37	14.53	14.53
ADJUSTMENT OF PMP FOR DRAINAGE AREA (%)[2] 6 HOURS	111		111	
12 HOURS	123		123	
24 HOURS	133		133	
48 HOURS	142		142	
72 HOURS	–		–	
SNYDER HYDROGRAPH PARAMETERS ZONE[3]	1		1	
C_p/C_t [4]	.45/1.23		.45/1.23	
L (MILES)[5]	4.17			
L_{ca} (MILES)[5]	1.88		L'=.6 [9]	
$T_p = C_t(L \cdot L_{ca})^{0.3}$ (hours)	2.28		.9 [10]	
SPILLWAY DATA CREST LENGTH (FT.)		47		26
FREEBOARD (FT.)		4		5.5
DISCHARGE COEFFICIENT		2.9		2.9
EXPONENT		1.5		1.5
ELEVATION		1367		1272
AREA (ACRES)[6] NORMAL POOL		261		91.8
ELEV. 1380		390	Elev. 1280	123
ELEV. _____			Elev. 1300	197
STORAGE (ACRE-FEET) NORMAL POOL[7]		1605		887
ELEV. 1348.6 [8]		0	Elev. 1243	0
ELEV. _____ [8]				
ELEV _____ [8]				

[1] Hydrometeorological Report 33 (Figure 1), U.S. Army, Corps of Engineers, 1956.

[2] Hydrometeorological Report 33 (Figure 2), U.S. Army, Corps of Engineers, 1956.

[3] Hydrological zone defined by Corps of Engineers, Baltimore District, for determining Snyder's Coefficients (C_p and C_t).

[4] Snyder's Coefficients.

[5] L = Length of longest water course from outlet to basin divide.
L_{ca} = Length of water course from outlet to point opposite the centroid of drainage area.

[6] Planimetered area encompased by contour upstream of dam.

[7] PennDER files.

[8] Computed by conic method.

[9] L' = Length of water course from end of reservoir to basin divide.

[10] $T_p = C_t \ (L')^{0.6}$.

#	ID										
1	A1	KEEN POND DAM	####	VAN AUKEN CREEK							
2	A2	CANAAN TWP., WAYNE COUNTY, PA.									
3	A3	NDI # PA-00092		PA DER # 64-13							
4	B	300	0	15	0	0	0	0	0	-4	0
5	B1	5									
6	J	1	9	1							
7	J1	1	.75	.5	.4	.3	.2	.15	.1	.05	
8	K		1					1			
9	K1		INFLOW HYDROGRAPH - ELK LAKE SUBAREA								
10	M	1	1	.89		14.53					
11	P		21.3	111	123	133	142				
12	T							1	.05		
13	W	1	.45								
14	X	-1.5	-.05	2							
15	K	1	2					1			
16	K1		RESERVOIR ROUTING - THRU ELK LAKE								
17	Y				1						
18	Y1	1						2922	-1		
19	Y4	1419	1420	1420.5	1421	1422	1423	1424	1424.9	1425.5	1426
20	Y5	0	12	23	35	65	105	151	198	482	884
21	$A	0	157	188.7	266.8						
22	$E	1363.2	1419	1420	1440						
23	$$	1419									
24	$U	1424.9									
25	K	1	3					1			
26	K1		ROUTING THRU REACH 2 - 3								
27	Y				1						
28	Y1	1									
29	Y6	.1	.08	.1	1371	1420	2600	.016			
30	Y7	0	1400	150	1400	300	1380	670	1371	675	1371
31	Y7	1290	1380	1540	1400	1940	1420				
32	K	1	4					1			
33	K1		ROUTING THRU REACH 3 - 4								
34	Y				1						
35	Y1	1									
36	Y6	.1	.07	.1	1331	1380	6350	.0063			
37	Y7	0	1380	250	1360	850	1340	1175	1331	1180	1331
38	Y7	1720	1340	2000	1360	2250	1380				
39	K	1	5					1			
40	K1		ROUTING THRU REACH 4 - 5								
41	Y				1						
42	Y1	1									
43	Y6	.1	.05	.1	1300	1360	5750	.0054			
44	Y7	0	1360	250	1340	375	1320	1410	1300	1420	1300
45	Y7	1650	1320	1900	1340	2050	1360				
46	K		6					1			
47	K1		INFLOW HYDROGRAPH - LITTLE KEEN POND SUBAREA								
48	M	1	1	9.36		14.53					
49	P		21.3	111	123	133	142				
50	T							1	.05		
51	W	3.19	.45								
52	X	-1.5	-.05	2							
53	K	2	7					1			
54	K1		COMBINE HYDROGRAPHS AT LITTLE KEEN POND								
55	K	1	8					1			
56	K1		RESERVOIR ROUTING - THRU LITTLE KEEN POND								
57	Y				1						
58	Y1	1						92	-1		
59	Y4	1291	1291.5	1292	1292.5	1293	1294	1295.5	1296.7	1297.5	1298.5
60	Y4	1300	1302								

	Y4	1						92	-1	
59	Y4	1291	1291.5	1292	1292.5	1293	1294	1295.5	1296.7	1297.5	1298.5
60	Y4	1300	1302
61	Y5	0	25	72	131	202	372	693	976	1386	2115
62	Y5	3903	7240
63	$A	0	19.6	179.5	509
64	$E1276.9	1291	1300	1320
65	$$	1291
66	$D1276.7
67	K	1	9					1
68	K1		ROUTING THRU REACH 8 - 9
69	Y				1
70	Y1	1
71	Y6	.1	.08	.1	1280	1340	550	.0073
72	Y7	0	1340	250	1320	410	1300	700	1280	710	1280
73	Y7	900	1300	1000	1320	1120	1340
74	K		10					1
75	K1		INFLOW HYDROGRAPH - LAKE LADORE SUBAREA
76	M	1	1	3.37		14.53
77	P		21.3	111	123	133	142
78	T							1	.05
79	W	2.28	.45
80	X	-1.5	.05	2
81	K	1	11					1
82	K1		RESERVOIR ROUTING - THRU LAKE LADORE
83	Y				1
84	Y1	1						1605	-1
85	Y4	1367	1367.4	1367.7	1368	1369	1370	1371	1371.5	1372	1372.5
86	Y5	0	36	81	155	491	1002	1694	2291	3311	4586
87	$A	0	261	390
88	$E1348.6	1367	1380
89	$$	1367
90	$D	1371
91	K	1	12					1
92	K1		ROUTING THRU REACH 11 - 12
93	Y				1
94	Y1	1
95	Y6	.1	.08	.1	1280	1340	1050	.06
96	Y7	0	1340	100	1320	290	1320	300	1300	350	1280
97	Y7	470	1300	520	1320	650	1340
98	K		13					1
99	K1		INFLOW HYDROGRAPH - KEEN POND SUBAREA
100	M	1	1	.91		14.53
101	P		21.3	111	123	133	142
102	T							1	.05
103	W	.9	.45
104	X	-1.5	-.05	2
105	K	3	14					1
106	K1		COMBINE HYDROGRAPHS AT KEEN POND
107	K	1	15					1
108	K1		RESERVOIR ROUTING - THRU KEEN POND
109	Y				1
110	Y1	1						927	-1
111	Y4	1272	1272.5	1273	1273.5	1274	1275	1276	1277.5	1278	1278.3
112	Y41278.7	1279.3	1281.5	1284
113	Y5	0	27	79	158	252	485	762	1252	1449	1598
114	Y5	1842	2325	5170	9850
115	$A	0	91.8	123	197
116	$E	1243	1272	1280	1300
117	$$	1272
118	$D1277.5

```
117          $$  12/2
118          $D1277.5
119          K    79
```

1   PREVIEW OF SEQUENCE OF STREAM NETWORK CALCULATIONS

                               RUNOFF HYDROGRAPH AT   1
                               ROUTE HYDROGRAPH TO   2
                               ROUTE HYDROGRAPH TO   3
                               ROUTE HYDROGRAPH TO   4
                               ROUTE HYDROGRAPH TO   5
                               RUNOFF HYDROGRAPH AT   6
                               COMBINE 2 HYDROGRAPHS AT   7
                               ROUTE HYDROGRAPH TO   8
                               ROUTE HYDROGRAPH TO   9
                               RUNOFF HYDROGRAPH AT   10
                               ROUTE HYDROGRAPH TO   11
                               ROUTE HYDROGRAPH TO   12
                               RUNOFF HYDROGRAPH AT   13
                               COMBINE 3 HYDROGRAPHS AT   14
                               ROUTE HYDROGRAPH TO   15
                               END OF NETWORK

          1***********************************
          FLOOD HYDROGRAPH PACKAGE (HEC-1)
          DAM SAFETY VERSION   JULY 1978
           LAST MODIFICATION 26 FEB 79
          ****

          RUN DATE* 79/12/29.
               TIME* 14.09.20.

                          KEEN POND DAM ****   VAN AUKEN CREEK
                          CANAAN TWP., WAYNE COUNTY, PA.
                          NDI # PA-00092   PA DER # 64-13

                               JOB SPECIFICATION
               NQ   NHR   NMIN   IDAY   IHR   IMIN   METRC   IPLT   IPRT   NSTAN
               300   0   15   0   0   0   0   0   -4   0
                                    JOPER   NWT   LROPT   TRACE
                                      5   0   0   0

                          MULTI-PLAN ANALYSES TO BE PERFORMED
                              NPLAN= 1 NRTIO= 9 LRTIO= 1
                RTIOS=   1.00   .75   .50   .40   .30   .20   .15   .10   .05

          **********   **********   **********   **********   **********

                               SUB-AREA RUNOFF COMPUTATION

                          INFLOW HYDROGRAPH - ELK LAKE SUBAREA

                          ISTAQ   ICOMP   IECON   ITAPE   JPLT   JPRT   INAME   ISTAGE   IAUTO
                            1   0   0   0   0   0   1   0   0

                               HYDROGRAPH DATA

**********   **********   **********   **********   **********

SUB-AREA RUNOFF COMPUTATION

INFLOW HYDROGRAPH - ELK LAKE SUBAREA

ISTAQ	ICOMP	IECON	ITAPE	JPLT	JPRT	IHGHE	ISTAGE	IAUTO
1	0	0	0	0	0	1	0	0

HYDROGRAPH DATA

IHYDG	IUHG	TAREA	SNAP	TRSDA	TRSPC	RATIO	ISNOW	ISAME	LOCAL
1	1	.89	0.00	14.53	0.00	0.000	0	0	0

PRECIP DATA

SPFE	PMS	R6	R12	R24	R48	R72	R96
0.00	21.30	111.00	123.00	133.00	142.00	0.00	0.00

TRSPC COMPUTED BY THE PROGRAM IS .813

LOSS DATA

LROPT	STRKR	DLTKR	RTIOL	ERAIN	STRKS	RTIOK	STRTL	CNSTL	ALSMX	RTIMP
0	0.00	0.00	1.00	0.00	0.00	1.00	1.00	.05	0.00	0.00

UNIT HYDROGRAPH DATA
TP= 1.00   CP= .45   NTA= 0

RECESSION DATA
STRTQ= -1.50   QRCSN= -.05   RTIOR= 2.00

UNIT HYDROGRAPH 36 END-OF-PERIOD ORDINATES, LAG= 1.01 HOURS, CP= .45 VOL= 1.00

26.	97.	184.	247.	253.	222.	187.	161.	137.	115.
99.	84.	72.	61.	52.	44.	39.	32.	27.	23.
20.	17.	14.	12.	10.	9.	8.	6.	5.	5.
4.	3.	3.	2.	2.	2.				

0   END-OF-PERIOD FLOW

MO.DA	HR.MN	PERIOD	RAIN	EXCS	LOSS	COMP Q	MO.DA	HR.MN	PERIOD	RAIN	EXCS	LOSS	COMP Q

SUM 24.38 22.20 2.39 51685.
(624.)(564.)(61.)(1463.56)

**********   **********   **********   **********   **********

HYDROGRAPH ROUTING

RESERVOIR ROUTING - THRU ELK LAKE

ISTAQ	ICOMP	IECON	ITAPE	JPLT	JPRT	IHAME	ISTAGE	IAUTO
2	1	0	0	0	0	1	0	0

ROUTING DATA

QLOSS	CLOSS	AVG	IRES	ISAME	IOPT	IPUP	LSTR
0.0	0.000	0.00	1	0	0	0	0

NSTPS	NSTDL	LAG	ANSKK	X	TSK	STORA	ISPRAT
1	0	0	0.000	0.000	0.000	2922.	-1

STAGE	1419.00	1420.00	1420.50	1421.00	1422.00	1423.00	1424.00	1424.90	1425.50	1426.
FLOW	-8.00	-10.00	22.00	15.00						

```
**********      **********      *********      *********      *********

                         HYDROGRAPH ROUTING

                 RESERVOIR ROUTING - THFU ELK LAKE

              ISTAQ   ICOMP   IECON   ITAPE    JPLT    JPRT   TRACE   TITAN   IAUTO
                2       1       0       0       0       0       1       2
                               ROUTING DATA
        QLOSS   CLOSS    AVG    IRES   ISAME   IOPT   IFHP            LSTR
         0.0    0.000   0.00     1       0      0      0                0

                NSTPS   NSTDL    LAG    ANSKK      X     TSK   STORA  ISPRAT
                  1       0       0     0.000   0.000   0.000   2922.    -1

STAGE   1419.00    1420.00    1420.50    1421.00    1422.00   1423.00    1424.00    1424.90    1425.50    1425.7

FLOW      0.00      12.00      23.00      35.00      65.00    105.00     151.00     198.00     482.00     884.

SURFACE AREA=      0.     157.      187.      267.

    CAPACITY=      0.    2920.     3073.     7625.

   ELEVATION=   1363.    1419.     1420.     1440.

                CREL    SPWID    COGW    EXPW    ELEVL    COOL    CAREA    EXPL
               1419.0     0.0     0.0     0.0      0.0     0.0      0.0     0.0

                                      DAM DATA
                              TOPEL    COOD    EXPD   DAMWID
                              1424.9    0.0     0.0      0.

PEAK OUTFLOW IS     147. AT TIME  47.25 HOURS


PEAK OUTFLOW IS      98. AT TIME  47.50 HOURS


PEAK OUTFLOW IS      54. AT TIME  48.25 HOURS


PEAK OUTFLOW IS      37. AT TIME  48.50 HOURS


PEAK OUTFLOW IS      26. AT TIME  49.00 HOURS


PEAK OUTFLOW IS      15. AT TIME  49.50 HOURS


PEAK OUTFLOW IS      10. AT TIME  49.75 HOURS


PEAK OUTFLOW IS       7. AT TIME  49.75 HOURS


PEAK OUTFLOW IS       4. AT TIME  49.50 HOURS
```

********** ********** ********** ********** **********

HYDROGRAPH ROUTING

ROUTING THRU REACH 2 - 3

ISTAQ	ICOMP	IECON	ITAPE	JPLT	JPRT	IMAGE	ISTAQ	IAUTO
3	1	0	0	0	0	1	0	0

ROUTING DATA

QLOSS	CLOSS	AVG	IRES	ISAME	IOPT	IPUP		LSTR
0.0	0.000	0.00	1	0	0	0		0

NSTPS	NSTDL	LAG	AMSKK	X	TSK	STOKA	ISPRAT
1	0	0	0.000	0.000	0.000	0.	0

NORMAL DEPTH CHANNEL ROUTING

QN(1)	QN(2)	QN(3)	ELNVT	ELMAX	RLNTH	SEL
.1000	.0800	.1000	1371.0	1420.0	2600.	.01600

CROSS SECTION COORDINATES--STA,ELEV,STA,ELEV--ETC
```
    0.00 1400.00  150.00 1400.00  300.00 1380.00  670.00 1371.00  675.00 1371.00
 1290.00 1380.00 1540.00 1400.00 1740.00 1420.00
```

AGE	0.00	22.49	86.43	197.82	346.04	506.45	674.80	851.09	1035.33	1222.?
	1427.61	1635.66	1869.09	2116.11	2371.06	2633.96	2904.60	3183.58	3470.30	3764.?

OUTFLOW	0.00	1063.85	6601.85	17314.30	44172.60	81672.86	128533.72	184371.69	248960.53	32216?.?
	403917.59	494179.59	589763.65	700574.45	821303.62	951850.95	1092171.08	1242252.82	1402108.13	1571765.?

STAGE	1371.00	1373.58	1376.16	1378.74	1381.32	1383.89	1386.47	1389.05	1391.63	1394.?
	1396.79	1399.37	1401.95	1404.53	1407.11	1409.68	1412.26	1414.84	1417.42	1420.?

FLOW	0.00	1063.85	6601.85	19314.30	44172.60	81672.86	128533.72	184371.69	248960.53	32216?.?
	403917.59	494179.59	589763.65	700574.45	821303.62	951850.95	1092171.08	1242252.82	1402108.13	1571765.?

MAXIMUM STAGE IS   1371.4

MAXIMUM STAGE IS   1371.2

MAXIMUM STAGE IS   1371.1

MAXIMUM STAGE IS   1371.1

MAXIMUM STAGE IS   1371.1

MAXIMUM STAGE IS   1371.0

MAXIMUM STAGE IS   1371.0

MAXIMUM STAGE IS   1371.0

MAXIMUM STAGE IS   1371.0

MAXIMUM STAGE IS   1371.0

HYDROGRAPH ROUTING

ROUTING THRU REACH 3 - 4

	ISTAQ	ICOMP	IECON	ITAPE	JPLT	JPRT	INAME	ISTAQ	IAUTO
	4	1	0	0	0	0	1	0	0

ROUTING DATA

	QLOSS	CLOSS	AVG	IRES	ISAME	IOPT	IFMP	LSTR
	0.0	0.000	0.00	1	0	0	0	0

	NSTPS	NSTDL	LAG	ANSKK	X	TSK	STORA	ISPRAT
	1	0	0	0.000	0.000	0.000	0.	0

NORMAL DEPTH CHANNEL ROUTING

QN(1)	QN(2)	QN(3)	ELNVT	ELMAX	RLNTH	SEL
.1000	.0700	.1000	1331.0	1380.0	6350.	.00630

CROSS SECTION COORDINATES--STA,ELEV,STA,ELEV--ETC
0.00 1380.00 250.00 1360.00 850.00 1340.00 1175.00 1331.00 1180.00 1331.00
1720.00 1340.00 2000.00 1360.00 2250.00 1380.00

STORAGE	0.00	48.47	190.13	424.97	746.42	1116.52	1529.42	1984.91	2483.02	3023.
	3607.35	4233.48	4897.02	5585.35	6297.92	7034.73	7795.78	8561.07	9390.60	10204.

OUTFLOW	0.00	674.18	4170.87	12189.37	27860.56	51836.16	82337.29	119408.54	163137.92	213470.
	271093.31	335628.28	408707.38	489305.78	576941.38	671601.97	773294.71	882041.03	997873.21	1120931.

STAGE	1331.00	1333.58	1336.16	1338.74	1341.32	1343.87	1346.47	1349.05	1351.65	1354.
	1356.79	1359.37	1361.95	1364.53	1367.11	1369.68	1372.26	1374.84	1377.42	1380.

FLOW	0.00	674.18	4170.87	12189.37	27860.56	51836.16	82337.29	119408.54	163137.92	213450.
	271093.31	335628.28	408707.38	489305.78	576941.38	671601.97	773294.71	882041.03	997873.21	1120931.

MAXIMUM STAGE IS   1331.6

MAXIMUM STAGE IS   1331.4

MAXIMUM STAGE IS   1331.2

MAXIMUM STAGE IS   1331.2

MAXIMUM STAGE IS   1331.1

MAXIMUM STAGE IS   1331.1

MAXIMUM STAGE IS   1331.0

MAXIMUM STAGE IS   1331.0

MAXIMUM STAGE IS   1331.0

HYDROGRAPH ROUTING

ROUTING THRU REACH 4 - 5

ISTAQ	ICOMP	IECON	ITACE	JPLT	JPRI	INAME	ISTAGE	IAUTO
5	1	0	0	0	0	1	0	0

ROUTING DATA

QLOSS	CLOSS	AVG	IRES	ISAME	IOPT	IPHF		LSTR
0.0	0.000	0.00	1	0	0	0		0

NSTPS	NSTDL	LAG	AMSKK	X	TSK	STORA	ISPRAT
1	0	0	0.000	0.000	0.000	0.	0

NORMAL DEPTH CHANNEL ROUTING

ON(1)	ON(2)	ON(3)	ELNVT	ELMAX	RLNTH	SEL
.1000	.0500	.1000	1300.0	1360.0	5750.	.00540

CROSS SECTION COORDINATES--STA,ELEV,STA,ELEV--ETC
    0.00 1360.00 250.00 1340.00 375.00 1320.00 1410.00 1300.00 1420.00 1300.00
   1650.00 1320.00 1900.00 1340.00 2050.00 1360.00

AGE	0.00	45.80	174.86	387.17	692.75	1061.59	1523.69	2056.03	2616.31	3201.7
	3810.90	4445.23	5104.23	5788.01	6497.74	7233.81	7996.20	8784.92	9599.97	10441.

OUTFLOW	0.00	1062.14	6341.56	18303.81	38797.12	70247.58	113733.23	180064.13	264861.55	362979.
	473979.89	597540.01	733421.08	881417.08	1041495.18	1213626.35	1397715.69	1593710.14	1801582.55	2021324.

STAGE	1300.00	1303.16	1306.32	1309.47	1312.63	1315.79	1318.95	1322.11	1325.26	1329.
	1331.59	1334.74	1337.89	1341.05	1344.21	1347.37	1350.53	1353.68	1356.84	1360.

FLOW	0.00	1062.14	6341.56	18303.81	38797.12	70247.59	113733.23	180064.13	264861.55	362979.
	473979.89	597540.01	733421.08	881417.08	1041495.18	1213626.35	1397715.69	1593710.14	1801582.55	2021324.

MAXIMUM STAGE IS   1300.4

MAXIMUM STAGE IS   1300.3

MAXIMUM STAGE IS   1300.2

MAXIMUM STAGE IS   1300.1

MAXIMUM STAGE IS   1300.1

MAXIMUM STAGE IS   1300.0

MAXIMUM STAGE IS   1300.0

MAXIMUM STAGE IS   1300.0

MAXIMUM STAGE IS   1300.0

MAXIMUM STAGE IS   1300.0

```
**********      **********      *********      *********      *********
```

SUB-AREA RUNOFF COMPUTATION

INFLOW HYDROGRAPH - LITTLE KEEN POND SUBAREA

ISTAQ	ICOMP	IECON	ITAPE	JPLT	JPRT	INAME	ISTAGE	IAUTO
6	0	0	0	0	0	1	0	0

HYDROGRAPH DATA

IHYDG	IUHG	TAREA	SNAP	TRSDA	TRSPC	RATIO	ISNOW	ISAME	LOCAL
1	1	9.36	0.00	14.53	0.00	0.000	0	0	0

PRECIP DATA

SPFE	PMS	R6	R12	R24	R48	R72	R96
0.00	21.30	111.00	123.00	133.00	142.00	0.00	0.00

TRSPC COMPUTED BY THE PROGRAM IS .813

LOSS DATA

LROPT	STRKR	DLTKR	RTIOL	ERAIN	STRKS	RTIOK	STRTL	CNSTL	ALSHX	RTIMP
0	0.00	0.00	1.00	0.00	0.00	1.00	1.00	.05	0.00	0.00

UNIT HYDROGRAPH DATA

$TP= 3.19$ $CP= .45$ $NTA= 0$

RECESSION DATA

$STRTQ= -1.50$ $QRCSN= -.05$ $RTIOR= 2.00$

UNIT HYDROGRAPH100 END-OF-PERIOD ORDINATES, LAG= 3.19 HOURS, CP= .45 VOL= .99

17.	64.	133.	214.	306.	405.	510.	611.	699.	771.
826.	863.	878.	860.	822.	782.	744.	708.	674.	641.
610.	581.	553.	526.	501.	476.	453.	431.	410.	391.
372.	354.	337.	320.	305.	290.	276.	263.	250.	238.
226.	216.	205.	195.	186.	177.	169.	160.	152.	145.
138.	131.	125.	119.	113.	108.	102.	98.	93.	88.
84.	80.	76.	72.	69.	66.	62.	59.	57.	54.
51.	49.	46.	44.	42.	40.	38.	36.	34.	33.
31.	30.	29.	27.	26.	24.	23.	22.	21.	20.
19.	18.	17.	16.	16.	15.	14.	13.	13.	12.

0   END-OF-PERIOD FLOW

MO.DA	HR.MN	PERIOD	RAIN	EXCS	LOSS	COMP Q	MO.DA	HR.MN	PERIOD	RAIN	EXCS	LOSS	COMP Q

SUM 24.58 22.20   2.39   532800.
(624.)(564.)(61.)(15087.22)

```
**********      **********      *********      *********      *********
```

COMBINE HYDROGRAPHS

COMBINE HYDROGRAPHS AT LITTLE KEEN POND

ISTAQ	ICOMP	IECON	ITAPE	JPLT	JPRT	INAME	ISTAGE	IAUTO
7	2	0	0	0	0	1	0	0

HYDROGRAPH ROUTING

RESERVOIR ROUTING - THRU LITTLE KEEN POND

	ISTAQ	ICOMP	ICONN	ITAPE	JPLT	JPRT	IHAHE	ISTAGE	IAUTO
	8	1	0	0	0	0	1	0	0

ROUTING DATA

	QLOSS	CLOSS	AVG	IRES	ISAHE	IOPT	IFHP		LSTR
	0.0	0.000	0.00	1	0	0	0		0

	NSTPS	NSTDL	LAG	AHSKK	X	TSK	STORA	ISPRAT
	1	0	0	0.000	0.000	0.000	92.	-1

STAGE	1291.00	1291.50	1292.00	1292.50	1293.00	1274.00	1295.50	1296.70	1297.50	1298.50
	1300.00	1302.00								

FLOW	0.00	25.00	72.00	131.00	202.00	372.00	683.00	976.00	1386.00	2119.00
	3903.00	7240.00								

SURFACE AREA=	0.	20.	180.	509.
CAPACITY=	0.	92.	867.	7472.
ELEVATION=	1277.	1291.	1300.	1320.

	CREL	SPWID	CDOW	EXPW	ELEVL	CODL	CAREA	EXPL
	1291.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

DAM DATA

TOPEL	CODD	EXPD	DAMWID
1296.7	0.0	0.0	0.

EAK OUTFLOW IS   12044. AT TIME   44.50 HOURS

EAK OUTFLOW IS   9114. AT TIME   44.50 HOURS

PEAK OUTFLOW IS   6069. AT TIME   44.50 HOURS

PEAK OUTFLOW IS   4791. AT TIME   44.50 HOURS

PEAK OUTFLOW IS   3473. AT TIME   44.75 HOURS

PEAK OUTFLOW IS   2149. AT TIME   45.25 HOURS

PEAK OUTFLOW IS   1539. AT TIME   45.50 HOURS

JUTFLOW IS   933. AT TIME   46.00 HOURS

PEAK OUTFLOW IS   494. AT TIME   45.50 HOURS

```
**********      **********      **********      *********      *********


                         HYDROGRAPH ROUTING

              ROUTING THRU REACH 8 - 9

                ISTAQ  ICOMP  IECON  ITAPE   JPLT   JFRT  JNAME  ISTAR  IAUTO
                  9      1      0      0      0      0      1      0      0
                              ROUTING DATA
         QLOSS   CLOSS   AVG   IRES  ISAME  IOPT  IPMP           LSTR
          0.0   0.000   0.00    1     0     0     0              0

                NSTPS  NSTDL   LAG   ANSKK     X    TSK   STORA  ISPRAT
                  1      0      0    0.000  0.000  0.000   0,      0
```

NORMAL DEPTH CHANNEL ROUTING

```
      QN(1)   QN(2)   QN(3)   ELNVT   ELMAX   RLNTH    SEL
      .1000   .0800   .1000  1280.0  1340.0   550,   .00730
```

```
    CROSS SECTION COORDINATES--STA,ELEV,STA,ELEV--ETC
       0.00 1340.00  250.00 1320.00  410.00 1300.00  700.00 1280.00  710.00 1280.00
     900.00 1300.00 1000.00 1320.00 1120.00 1340.00
```

STORAGE	0.00	1.91	6.94	14.79	25.77	39.77	56.79	76.52	97.97	121.0
	145.77	172.13	200.12	229.79	261.64	295.81	332.32	371.15	412.32	455.7

OUTFLOW	0.00	350.50	1927.33	5393.39	11305.92	20163.50	32425.13	51086.56	75126.88	103320.6
	135715.57	172370.47	213353.50	258532.48	307981.26	362353.92	421815.63	486535.39	556682.04	632422.

STAGE	1280.00	1283.16	1286.32	1289.47	1292.63	1295.79	1298.95	1302.11	1305.26	1308.4
	1311.58	1314.74	1317.89	1321.05	1324.21	1327.37	1330.53	1333.68	1336.84	1340.0

FLOW	0.00	350.50	1927.33	5393.39	11305.92	20163.50	32425.13	51086.56	75126.88	103320.6
	135715.57	172370.47	213353.50	258532.48	307981.26	362353.92	421815.63	486535.39	556682.04	632422.

```
MAXIMUM STAGE IS    1292.9

MAXIMUM STAGE IS    1291.5

MAXIMUM STAGE IS    1289.8

MAXIMUM STAGE IS    1288.9

MAXIMUM STAGE IS    1287.7

MAXIMUM STAGE IS    1286.5

    JM STAGE IS     1285.5

MAXIMUM STAGE IS    1284.3

MAXIMUM STAGE IS    1283.4
```

```
**********        **********        **********        **********        **********

                          SUB-AREA RUNOFF COMPUTATION

                      INFLOW HYDROGRAPH - LAKE LADORE SUBAREA

                    ISTAQ   ICOMP   IECON   ITAPE    JFLT    JPRT   INAME  ISTAGE   IAUTO
                      10      0       0       0       0       0       1       0       0

                                  HYDROGRAPH DATA
            IHYDG   IUHG   TAREA    SNAP   TRSDA   TRSPC   RATIO   ISNOW   ISAME   LOCAL
              1      1     3.37    0.00   14.53    0.00   0.000     0       0       0

                                    PRECIP DATA
                   SFFE     FMS      R6     R12     R24     R48     R72     R96
                   0.00   21.30  111.00  123.00  133.00  142.00    0.00    0.00
TRSPC COMPUTED BY THE PROGRAM IS  .813


                                    LOSS DATA
        LROPT   STRKR   DLTKR   RTIOL   ERAIN   STRKS   RTIOK   STRTL   CNSTL   ALSHX   RTIMP
          0     0.00    0.00    1.00    0.00    0.00    1.00    1.00    .05     0.00    0.00

                              UNIT HYDROGRAPH DATA
                        TP= 2.20   CP= .45   NTA= 0

                                 RECESSION DATA
                    STRTQ= -1.50   QRCSN=   .05   RTIOR= 2.00

        UNIT HYDROGRAPH 81 END-OF-PERIOD ORDINATES, LAG=  2.30 HOURS, CP=  .45  VOL= 1.00
          14.      52.     104.     170.     240.     310.     368.     410.     436.     437.
         416.     388.     361.     337.     311.     293.     273.     255.     233.     221.
         207.     193.     180.     167.     156.     146.     136.     127.     118.     110.
         103.      96.      87.      83.      78.      72.      67.      63.      59.      55.
          51.      43.      44.      41.      39.      36.      34.      31.      29.      27.
          25.      24.      23.      21.      19.      18.      17.      16.      14.      14.
          13.      12.      11.      10.      10.       9.       8.       8.       7.       7.
           6.       6.       5.       5.       5.       4.       4.       4.       4.       3.
           3.

        0                                END-OF-PERIOD FLOW
  MO.DA  HR.MN  PERIOD   RAIN    EXCS    LOSS    COMP Q      MO.DA  HR.MN  PERIOD   RAIN    EXCS    LOSS    COMP Q



                                                          SUM   24.58  22.20    2.39  192108.
                                                              ( 624.)( 564.)(  61.)( 5439.89)



        **********        **********        **********        **********        **********

                                  HYDROGRAPH ROUTING

                          RESERVOIR ROUTING - THRU LAKE LADORE

                    ISTAQ   ICOMP   IECON   ITAPE    JFLT    JPRT   INAME  ISTAGE   IAUTO
                      11      1       0       0       0       0       1       0       0
                                    ROUTING DATA
                QLOSS   CLOSS    AVG    IRES   ISAME   IOPT   IPRF            LSTR
                 0.0    0.000   0.00     1       0       0       0             0
```

```
**********     **********     **********     **********     **********
```

HYDROGRAPH ROUTING

RESERVOIR ROUTING - THRU LAKE LADORE

	ISTAQ	ICOMP	IECON	ITAPE	JPLT	JPRT	INAME	ISTAGE	IAUTO
	11	1	0	0	0	0	1	0	0

ROUTING DATA

	QLOSS	CLOSS	AVG	IRES	ISAME	IOPT	IPMP		LSTR
	0.0	0.000	0.00	1	0	0	0		0

	NSTPS	NSTDL	LAG	AMSKK	X	TSK	STORA	ISFRAT
	1	0	0	0.000	0.000	0.000	1605.	-1

STAGE	1367.00	1367.40	1367.70	1368.00	1369.00	1370.00	1371.00	1371.50	1372.00	1372.
FLOW	0.00	36.00	81.00	155.00	491.00	1002.00	1674.00	2291.00	3311.00	4586.0

SURFACE AREA=	0.	261.	390.
CAPACITY=	0.	1601.	5804.
ELEVATION=	1349.	1367.	1380.

	CREL	SPWID	CDOW	EXPW	ELEVL	CDOL	CAREA	EXPL
	1367.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

DAM DATA

	TOPEL	CODD	EXPD	DAMWID
	1371.0	0.0	0.0	0.

PEAK OUTFLOW IS   4477. AT TIME 44.25 HOURS

PEAK OUTFLOW IS   2836. AT TIME 44.75 HOURS

PEAK OUTFLOW IS   1471. AT TIME 45.75 HOURS

PEAK OUTFLOW IS   1085. AT TIME 46.25 HOURS

PEAK OUTFLOW IS   743. AT TIME 46.50 HOURS

PEAK OUTFLOW IS   424. AT TIME 47.25 HOURS

PEAK OUTFLOW IS   295. AT TIME 47.50 HOURS

PEAK OUTFLOW IS   161. AT TIME 48.25 HOURS

PEAK OUTFLOW IS   59. AT TIME 49.50 HOURS

********** ********** ********** ********** **********

HYDROGRAPH ROUTING

ROUTING THRU REACH 11 - 12

	ISTAR	ICOMP	IECON	ITAPE	JPLT	JPRT	INAME	ISTAGE	IAUTO
	12	1	0	0	0	0	1	0	0

ROUTING DATA

QLOSS	CLOSS	AVG	IRES	ISAME	IOPT	IFHP		LSTR
0.0	0.000	0.00	1	0	0	0		0

	NSTPS	NSTDL	LAG	AMSKK	X	TSK	STORA	ISPRAT
	1	0	0	0.000	0.000	0.000	0.	0

NORMAL DEPTH CHANNEL ROUTING

QN(1)	QN(2)	QN(3)	ELINVT	ELMAX	RLNTH	SEL
.1000	.0800	.1000	1280.0	1340.0	1050.	.06000

CROSS SECTION COORDINATES--STA,ELEV,STA,ELEV--ETC

0.00 1340.00 100.00 1320.00 290.00 1320.00 300.00 1300.00 350.00 1280.00
470.00 1300.00 520.00 1320.00 650.00 1340.00

STORAGE	0.00	1.02	4.09	9.17	16.35	25.54	36.78	47.77	63.55	78.
	93.27	109.22	125.89	148.21	182.48	219.52	259.32	301.89	347.22	395.

OUTFLOW	0.00	256.67	1629.74	4805.01	10348.19	18762.52	30507.92	43090.59	70296.08	95505.1
	124833.77	157010.11	192396.89	232228.10	283333.70	344188.51	414248.05	493440.55	581856.98	679664

STAGE	1280.00	1283.16	1286.32	1287.47	1292.63	1295.79	1298.95	1302.11	1305.26	1308.
	1311.58	1314.74	1317.89	1321.05	1324.21	1327.37	1330.53	1333.68	1336.84	1340.

FLOW	0.00	256.67	1629.74	4805.01	10348.19	18762.52	30507.92	48090.59	70296.08	95505.1
	124833.77	157010.11	192396.89	232228.10	283333.70	344188.51	414248.05	493440.55	581856.98	679664.

MAXIMUM STAGE IS   1289.1

MAXIMUM STAGE IS   1287.5

MAXIMUM STAGE IS   1286.0

MAXIMUM STAGE IS   1285.1

MAXIMUM STAGE IS   1284.3

MAXIMUM STAGE IS   1283.5

MAXIMUM STAGE IS   1283.2

MAXIMUM STAGE IS   1282.0

MAXIMUM STAGE IS   1280.7

```
**********        **********        **********        **********        **********

                        SUB-AREA RUNOFF COMPUTATION

                INFLOW HYDROGRAPH - KEEN POND SUBAREA

                ISTAQ   ICOMP   IECON   ITAPE    JPLT    JPRT   THAME  ISTAGE  IAUTO
                  13      0       0       0       0       0       1      0       0

                            HYDROGRAPH DATA
        IHYDG   IUHG    TAREA    SNAP   TRSDA   TRSPC   RATIO   ISNOW   ISARC   LOCAL
          1       1      .91    0.00   14.53    0.00   0.000     0       0       0

                            PRECIP DATA
                SPFE     FMS     R6     R12     R24     R48     R72     R96
                0.00    21.30  111.00  123.00  133.00  142.00    0.00    0.00
TRSPC COMPUTED BY THE PROGRAM IS  .813

                            LOSS DATA
        LROPT   STRKR   DLTKR   RTIOL   ERAIN   STRKS   RTIOK   STRTL   CNSTL   ALSMX   RTIMP
          0     0.00    0.00    1.00    0.00    0.00    1.00    1.00     .05    0.00    0.00

                        UNIT HYDROGRAPH DATA
                    TP=   .90    CP=  .45    NTA=  0

                        RECESSION DATA
                STRTQ=  -1.50    QRCSN=  -.05    RTIOR= 2.00

        UNIT HYDROGRAPH 34 END-OF-PERIOD ORDINATES, LAG=    .91 HOURS, CP=  .45  VOL= 1.00
          37,     135,     240,     282,     258,     210,     184,     155,     131,     110,
          93,      79,      66,      56,      47,      40,      34,      28,      24,      20,
          17,      14,      12,      10,       9,       7,       6,       5,       4,       4,
           3,       3,       2,       2,

       0                              END-OF-PERIOD FLOW
MO.DA  HR.MN  PERIOD  RAIN   EXCS   LOSS   COMP Q      MO.DA  HR.MN  PERIOD  RAIN   EXCS   LOSS   COMP Q




                                                    SUM  24.59  22.20   2.39   52816.
                                                       ( 624.)( 564.)(  61.)( 1495.59)


**********        **********        **********        **********        **********

                        COMBINE HYDROGRAPHS

                COMBINE HYDROGRAPHS AT KEEN POND

                ISTAQ   ICOMP   IECON   ITAPE    JPLT    JPRT   THAME  ISTAGE  IAUTO
                  14      3       0       0       0       0       1      0       0


**********        **********        **********        **********        **********

                        HYDROGRAPH ROUTING
```

HYDROGRAPH ROUTING

RESERVOIR ROUTING - THRU KEEN POND

ISTAQ	ICOMP	IECON	ITAPE	JPLT	JPRT	IPUNCH	ISTAGE	IAUTO
15	1	0	9	0	0	1	0	0

ROUTING DATA

QLOSS	CLOSS	AVG	IRES	ISAME	IOPT	IFHP	LSTR
0.0	0.000	0.00	1	0	0	0	0

NSTPS	NSTDL	LAG	AMSKK	X	TSK	STORA	ISPRAT
1	0	0	0.000	0.000	0.000	887.	-1

STAGE	1272.00	1272.50	1273.00	1273.50	1274.00	1275.00	1276.00	1277.50	1278.00	1278.3
	1278.70	1279.30	1281.50	1284.00						

FLOW	0.00	27.00	79.00	158.00	252.00	485.00	762.00	1252.00	1449.00	1549.
	1842.00	2325.00	5190.00	9850.00						

SURFACE AREA=	0.	92.	123.	197.

CAPACITY=	0.	887.	1744.	4915.

ELEVATION=	1243.	1272.	1280.	1300.

CREL	SPWID	COQW	EXPW	ELEVL	COOL	CAREA	EXPL
1272.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

DAM DATA

TOPEL	COQD	EXPD	DAMWID
1277.5	0.0	0.0	0.

PEAK OUTFLOW IS   16352. AT TIME 45.25 HOURS

PEAK OUTFLOW IS   11828. AT TIME 45.25 HOURS

PEAK OUTFLOW IS   7400. AT TIME 45.50 HOURS

PEAK OUTFLOW IS   5642. AT TIME 45.75 HOURS

PEAK OUTFLOW IS   3950. AT TIME 46.25 HOURS

PEAK OUTFLOW IS   2204. AT TIME 48.00 HOURS

PEAK OUTFLOW IS   1439. AT TIME 49.25 HOURS

PEAK OUTFLOW IS   886. AT TIME 50.50 HOURS

PEAK OUTFLOW IS   399. AT TIME 50.75 HOURS

PEAK FLOW AND STORAGE (END OF PERIOD) SUMMARY FOR MULTIPLE PLAN-RATIO ECONOMIC COMPUTATIONS
FLOWS IN CUBIC FEET PER SECOND (CUBIC METERS PER SECOND)
AREA IN SQUARE MILES (SQUARE KILOMETERS)

				RATIOS APPLIED TO FLOWS								
OPERATION	STATION	AREA	PLAN	RATIO 1 1.00	RATIO 2 .75	RATIO 3 .50	RATIO 4 .40	RATIO 5 .30	RATIO 6 .20	RATIO 7 .15	RATIO 8 .10	RATIO .0?
HYDROGRAPH AT	1	.89 (2.31)	1	2531. (71.69)(	1898. 53.76)(	1266. 35.84)(	1012. 28.67)(	759. 21.50)(	506. 14.34)(	380. 10.75)(	253. 7.17)(	127 .3.??
ROUTED TO	2	.89 (2.31)	1	149. (4.23)(	98. 2.77)(	54. 1.53)(	39. 1.11)(	26. .75)(	15. .42)(	10. .30)(	7. .20)(	4 .11
ROUTED TO	3	.89 (2.31)	1	149. (4.23)(	98. 2.77)(	54. 1.53)(	39. 1.11)(	26. .75)(	15. .42)(	10. .30)(	7. .20)(	4 .11
ROUTED TO	4	.89 (2.31)	1	149. (4.21)(	97. 2.76)(	54. 1.52)(	39. 1.11)(	26. .75)(	15. .42)(	10. .30)(	7. .20)(	4. .11
ROUTED TO	5	.89 (2.31)	1	149. (4.21)(	97. 2.76)(	54. 1.52)(	39. 1.11)(	26. .75)(	15. .42)(	10. .30)(	7. .20)(	? .11
HYDROGRAPH AT	6	9.36 (24.24)	1	13766. (389.82)(	10325. 292.37)(	6883. 194.91)(	5507. 155.93)(	4130. 116.95)(	2753. 77.96)(	2065. 58.47)(	1377. 38.98)(	68? 19.4?
2 COMBINED	7	10.25 (26.55)	1	13841. (391.94)(	10373. 293.74)(	6911. 195.68)(	5527. 156.50)(	4144. 117.33)(	2762. 78.20)(	2071. 58.66)(	1381. 39.11)(	69? 1?.
ROUTED TO	8	10.25 (26.55)	1	12044. (341.06)(	9114. 258.08)(	6069. 171.86)(	4791. 135.67)(	3473. 98.33)(	2149. 60.85)(	1539. 43.59)(	933. 26.43)(	??? 14.?
ROUTED TO	9	10.25 (26.55)	1	12044. (341.06)(	9115. 258.12)(	6070. 171.88)(	4791. 135.67)(	3473. 98.34)(	2150. 60.87)(	1540. 43.60)(	933. 26.43)(	1.? 14.?
HYDROGRAPH AT	10	3.37 (8.73)	1	6128. (173.54)(	4596. 130.15)(	3064. 86.77)(	2451. 69.41)(	1839. 52.06)(	1226. 34.71)(	919. 26.03)(	613. 17.35)(	30? 8.?
ROUTED TO	11	3.37 (8.73)	1	4477. (126.77)(	2836. 80.30)(	1471. 41.66)(	1085. 30.71)(	743. 21.03)(	424. 11.99)(	295. 8.34)(	161. 4.56)(	? 1.?
ROUTED TO	12	3.37 (8.73)	1	4479. (126.82)(	2837. 80.34)(	1471. 41.65)(	1085. 30.72)(	743. 21.03)(	424. 11.99)(	295. 8.34)(	161. 4.56)(	5? 1.?
HYDROGRAPH AT	13	.91 (2.36)	1	2695. (76.32)(	2021. 57.24)(	1348. 38.16)(	1078. 30.53)(	809. 22.90)(	539. 15.26)(	404. 11.45)(	270. 7.63)(	13 3.?
3 COMBINED	14	14.53 (37.63)	1	17056. (482.9?)(	12287. 347.94)(	7700. 218.05)(	5974. 169.16)(	4283. 121.29)(	2612. 73.96)(	1658. 52.60)(	1104. 31.27)(	?5 15.?
ED TO	15	14.53 (37.63)	1	16352. (463.05)(	11828. 334.94)(	7400. 209.55)(	5642. 159.78)(	3950. 111.85)(	2204. 62.41)(	1439. 40.75)(	886. 25.10)(	?? 11.3

PLAN 1 ....

	INITIAL VALUE	SPILLWAY CREST	TOP OF DAM
ELEVATION	1419.01	1417.00	1424.79
STORAGE	2922.	2920.	4061.
OUTFLOW	0.	0.	159.

RATIO OF PMF	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
1.00	1423.96	0.00	3869.	149.	0.00	47.25	0.00
.75	1422.82	0.00	3639.	98.	0.00	47.50	0.00
.50	1421.63	0.00	3406.	54.	0.00	48.25	0.00
.40	1421.14	0.00	3311.	39.	0.00	48.50	0.00
.30	1420.64	0.00	3215.	26.	0.00	49.00	0.00
.20	1420.14	0.00	3119.	15.	0.00	49.50	0.00
.15	1419.87	0.00	3069.	10.	0.00	49.75	0.00
.10	1419.60	0.00	3020.	7.	0.00	49.75	0.00
.05	1419.31	0.00	2970.	4.	0.00	49.50	0.00

PLAN 1   STATION   3

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS
1.00	149.	1371.4	47.50
.75	98.	1371.2	47.75
.50	54.	1371.1	48.50
.40	39.	1371.1	48.75
.30	26.	1371.1	49.25
.20	15.	1371.0	49.75
.15	10.	1371.0	50.00
.10	7.	1371.0	50.00
.05	4.	1371.0	49.75

PLAN 1   STATION   4

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS
1.00	149.	1331.6	48.75
.75	97.	1331.4	49.00
.50	54.	1331.2	49.75
.40	39.	1331.2	50.00
.30	26.	1331.1	50.25
.20	15.	1331.1	50.75
.15	10.	1331.0	51.00
.10	7.	1331.0	51.00
.05	4.	1331.0	51.00

PLAN 1   STATION   5

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS

	MAXIMUM	MAXIMUM	TIME
RATIO	FLOW,CFS	STAGE,FT	HOURS
1.00	119.	1300.4	47.25
.75	77.	1300.3	49.75
.50	51.	1300.2	50.75
.40	37.	1300.1	50.50
.30	26.	1300.1	51.00
.20	15.	1300.0	51.50
.15	10.	1300.0	51.75
.10	7.	1300.0	51.50
.05	4.	1300.0	51.50

1

SUMMARY OF DAM SAFETY ANALYSIS
LITTLE KEEN POND

PLAN 1		INITIAL VALUE	SPILLWAY CREST	TOP OF DAM
	ELEVATION	1290.78	1291.00	1296.70
	STORAGE	92.	92.	409.
	OUTFLOW	0.	0.	976.

RATIO OF PMF	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
1.00	1304.88	8.18	1893.	17014.	23.25	44.50	0.00
.75	1303.12	6.42	1452.	9111.	20.75	44.50	0.00
.50	1301.30	4.60	1111.	6049.	17.75	44.50	0.00
.40	1300.53	3.83	965.	4791.	16.00	44.50	0.00
.30	1299.64	2.94	834.	3473.	13.75	44.75	0.00
.20	1298.53	1.83	681.	2149.	10.25	45.25	0.00
.15	1297.71	1.01	522.	1535.	7.75	45.50	0.00
.10	1296.53	0.00	391.	933.	0.00	46.00	0.00
.05	1294.59	0.00	235.	474.	0.00	45.50	0.00

	MAXIMUM	MAXIMUM	TIME
RATIO	FLOW,CFS	STAGE,FT	HOURS
1.00	17014.	1292.9	44.50
.75	9115.	1291.5	44.50
.50	6070.	1289.8	44.50
.40	4791.	1288.9	44.50
.30	3473.	1287.7	44.75
.20	2150.	1286.5	45.25
.15	1549.	1285.5	45.50
.10	933.	1284.3	46.00
.05	494.	1283.4	45.75

1

SUMMARY OF DAM SAFETY ANALYSIS
LAKE LAGOON

PLAN 1		INITIAL VALUE	SPILLWAY CREST	TOP OF DAM
	ELEVATION	1367.01	1367.00	1371.00
	STORAGE	1604.	1601.	2716.
	OUTFLOW	1.	0.	1694.

RATIO OF PMF	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
1.00	1372.46	1.46	3162.	4477.	9.25	44.25	0.00
.75	1371.77	.77	2949.	2836.	6.75	44.75	0.00
.50	1370.68	0.00	2822.	1471.	0.00	45.25	0.00
.40	1370.12	0.00	2453.	1085.	0.00	45.75	0.00
.30	1367.47	0.00	2279.	743.	0.00	46.50	0.00
.20	1368.80	0.00	2085.	424.	0.00	47.25	0.00
.15	1368.42	0.00	1979.	295.	0.00	47.50	0.00
.10	1368.02	0.00	1871.	161.	0.00	48.25	0.00
.05	1367.55	0.00	1747.	59.	0.00	49.50	0.00

PLAN 1   STATION   12

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS
1.00	4479.	1289.1	44.25
.75	2837.	1287.5	45.00
.50	1471.	1286.0	46.00
.40	1085.	1285.1	46.25
.30	743.	1284.3	46.50
.20	424.	1283.5	47.25
.15	295.	1283.2	47.50
.10	161.	1282.0	48.25
.05	59.	1280.7	49.50

SUMMARY OF DAM SAFETY ANALYSIS

KEEN POND

PLAN 1		INITIAL VALUE	SPILLWAY CREST	TOP OF DAM
	ELEVATION	1271.99	1272.00	1277.50
	STORAGE	886.	887.	1449.
	OUTFLOW	0.	0.	1252.

RATIO OF PMF	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
1.00	1287.49	9.99	2759.	16352.	26.75	45.25	0.00
.75	1285.06	7.56	2405.	11828.	24.50	45.25	0.00
.50	1282.69	5.19	2086.	7400.	21.25	45.50	0.00
.40	1281.74	4.24	1963.	5642.	19.25	45.75	0.00
.30	1280.55	3.05	1811.	3750.	16.25	46.25	0.00
.20	1279.15	1.65	1640.	2204.	11.75	48.00	0.00
.15	1277.97	.47	1503.	1439.	6.50	49.25	0.00
.10	1276.38	0.00	1325.	886.	0.00	50.50	0.00
.05	1274.63	0.00	1142.	399.	0.00	50.75	0.00

PEAK FLOW AND STORAGE (END OF PERIOD) SUMMARY FOR MULTIPLE PLAN-RATIO ECONOMIC COMPUTATIONS
FLOWS IN CUBIC FEET PER SECOND (CUBIC METERS PER SECOND)
AREA IN SQUARE MILES (SQUARE KILOMETERS)

RATIOS APPLIED TO FLOWS

OPERATION	STATION	AREA	PLAN	RATIO 1
				.39
HYDROGRAPH AT	1	.89	1	987.
		(2.31)		(27.95)(
ROUTED TO	2	.89	1	38.
		(2.31)	(	1.07)(
ROUTED TO	3	.89	1	38.
		(2.31)	(	1.07)(
ROUTED TO	4	.89	1	38.
		(2.31)	(	1.07)(
ROUTED TO	5	.89	1	38.
		(2.31)	(	1.07)(
HYDROGRAPH AT	6	9.36	1	5369.
		(24.24)	(	152.03)(
2 COMBINED	7	10.25	1	5398.
		(26.55)	(	152.58)(
ROUTED TO	8	10.25	1	4659.
		(26.55)	(	131.92)(
ROUTED TO	9	10.25	1	4659.
		(26.55)	(	131.92)(
HYDROGRAPH AT	10	3.37	1	2390.
		(8.73)	(	67.68)(
ROUTED TO	11	3.37	1	1044.
		(8.73)	(	29.57)(
ROUTED TO	12	3.37	1	1044.
		(8.73)	(	29.57)(
HYDROGRAPH AT	13	.91	1	1051.
		(2.36)	(	29.76)(
3 COMBINED	14	14.53	1	5805.
		(37.63)	(	164.38)(
ROUTED TO	15	14.53	1	5449.
		(37.63)	(	154.31)(
ROUTED TO	16	14.53	1	5448.
		(37.63)	(	154.28)(

. 1   SUMMARY OF DAM SAFETY ANALYSIS
                                        / / .   . . .

PLAN 1 . . . .   INITIAL VALUE   SPILLWAY CREST   TOP OF DAM
                          ELEVATION   1419.01   1419.00   142...
                          STORAGE   2922.   ....   4841.
                          OUTFLOW   0.   0.   198.

RATIO OF FMF	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
.39	1421.09	0.00	3301.	38.	0.00	48.75	0.00

PLAN 1   STATION   3

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS
.39	38.	1371.1	49.00

PLAN 1   STATION   4

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS
.39	38.	1331.1	50.00

PLAN 1   STATION   5

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS
.39	38.	1300.1	50.50

1   SUMMARY OF DAM SAFETY ANALYSIS
                                     LITTLE KEEN ....

PLAN 1 . . . .   INITIAL VALUE   SPILLWAY CREST   TOP OF DAM
                          ELEVATION   1290.98   1291.00   1296.70
                          STORAGE   92.   92.   409.
                          OUTFLOW   0.   0.   976.

RATIO OF FMF	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
.39	1300.45	3.75	950.	4659.	15.50	44.50	0.00

PLAN 1   STATION   9

	MAXIMUM	MAXIMUM	TIME
RATIO	FLOW,CFS	STAGE,FT	HOURS

PLAN 1   STATION   2

	MAXIMUM	MAXIMUM	TIME
RATIO	FLOW,CFS	STAGE,FT	HOURS
.39	4659.	1298.8	44.50

1
SUMMARY OF DAM SAFETY ANALYSIS

PLAN 1		INITIAL VALUE	SPILLWAY CREST	TOP OF DAM
	ELEVATION	1367.01	1367.00	1371.00
	STORAGE	1604.	1601.	2718.
	OUTFLOW	1.	0.	1694.

RATIO OF PMF	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
.39	1370.06	0.00	2442.	1044.	0.00	46.25	0.00

PLAN 1   STATION   12

	MAXIMUM	MAXIMUM	TIME
RATIO	FLOW,CFS	STAGE,FT	HOURS
.39	1044.	1285.0	46.25

1
SUMMARY OF DAM SAFETY ANALYSIS
KEEN POND

PLAN 1		INITIAL VALUE	SPILLWAY CREST	TOP OF DAM
	ELEVATION	1271.99	1272.00	1277.50
	STORAGE	886.	887.	1449.
	OUTFLOW	0.	0.	1252.

RATIO OF PMF	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
.39	1281.64	4.14	1950.	5449.	19.00	45.75	0.00

PLAN 1   STATION   16

	MAXIMUM	MAXIMUM	TIME
RATIO	FLOW,CFS	STAGE,FT	HOURS
.39	5448.	1244.0	46.00

1*******************************
FLOOD HYDROGRAPH PACKAGE (HEC-1)
DAM SAFETY VERSION   JULY 1978
LAST MODIFICATION 26 FEB 79
****
EOI ENCOUNTERED.
N>

```
 1   A1     KEEN POND DAM   ****   VAN AUKEN CREEK
 2   A2     CANAAN TWP., WAYNE COUNTY, PA.
 3   A3     NDI # PA-00092      FA DER # 64-13
 4   B    300      0     15     0     0     0     0     0    -4     0
 5   B1     5
 6   J      3     1     1
 7   J1   .39
 8   K            1                                        1
 9   K1          INFLOW HYDROGRAPH - ELK LAKE SUBAREA
10   M      1     1   .89          14.53                              1
11   P          21.3   111   123   133   142
12   T                                          1    .05
13   W      1   .45
14   X   -1.5  -.05     2
15   K      1     2                                        1
16   K1          RESERVOIR ROUTING - THRU ELK LAKE
17   Y                          1     1
18   Y1     1                                    2922    -1
19   Y4  1419  1420  1420.5  1421  1422  1423  1424  1424.9  1425.5  1426
20   Y5     0    12    23    35    65   105   151   198   482   884
21   $A     0   157  188.7  266.8
22   $E1363.2  1419  1420  1440
23   $$  1419
24   $01424.9
25   K      1     3                                        1
26   K1          ROUTING THRU REACH 2 - 3
27   Y                          1     1
28   Y1     1
29   Y6    .1   .08    .1  1371  1420  2600  .016
30   Y7     0  1400   150  1400   300  1380   670  1371   675  1371
31   Y7  1290  1380  1540  1400   1940  1420
32   K      1     4                                        1
33   K1          ROUTING THRU REACH 3 - 4
34   Y                          1     1
35   Y1     1
36   Y6    .1   .07    .1  1331  1360  6350  .0063
37   Y7     0  1380   250  1360   850  1340  1175  1331  1180  1331
38   Y7  1720  1340  2000  1360  2250  1380
39   K      1     5                                        1
40   K1          ROUTING THRU REACH 4 - 5
41   Y                          1     1
42   Y1     1
43   Y6    .1   .05    .1  1300  1360  5750  .0054
44   Y7     0  1360   250  1340   375  1320  1410  1300  1420  1300
45   Y7  1650  1320  1900  1340  2050  1360
46   K            6                                        1
47   K1          INFLOW HYDROGRAPH - LITTLE KEEN POND SUBAREA
48   M      1     1   9.36         14.53                              1
49   P          21.3   111   123   133   142
50   T                                          1    .05
51   W   3.19   .45
52   X   -1.5  -.05     2
53   K      2     7                                        1
54   K1          COMBINE HYDROGRAPHS AT LITTLE KEEN POND
55   K      1     8                                        1
56   K1          RESERVOIR ROUTING - THRU LITTLE KEEN POND
57   Y                          1     1
58   Y1     1                                      92    -1
59   Y4  1291  1291.5  1292  1292.5  1293   1294  1295.5  1296.7  1297.5  1298.5
```

```
58     II    1                                          52      -1
59     Y4  1291  1291.5  1292  1292.5  1293   1274  1295.5  1296.7  1297.5  1298.5
60     Y4  1300  1302
61     Y5    0     25    72    131    202    372    603     976    1306    2119
62     Y5  3903  7240
63     $A    0   19.6  179.5   509
64     $E1276.9  1291  1300   1320
65     $$  1291
66     $D1296.7
67     K     1     9                                      1
68     K1           ROUTING THRU REACH 8 - 9
69     Y                             1      1
70     Y1    1
71     Y6   .1    .08    .1   1280   1340   550   .0073
72     Y7    0   1340   250   1320   410   1300   700    1280    710    1280
73     Y7  900   1300  1000   1320  1120   1340
74     K          10                                      1
75     K1          INFLOW HYDROGRAPH - LAKE LADORE SUBAREA
76     M     1     1    3.37          14.53                         1
77     P         21.3   111   123    133    142
78     T                                        1      .05
79     W    2.28   .45
80     X   -1.5   .05     2
81     K     1    11                                      1
82     K1          RESERVOIR ROUTING - THRU LAKE LADORE
83     Y                             1      1
84     Y1    1                                  1605     -1
85     Y4  1367  1367.4  1367.7  1368  1369   1370   1371   1371.5  1372   1372.5
86     Y5    0     36    81    155    491   1002   1694    2291    3311    4586
87     $A    0    261   390
88     $E1348.6  1367  1380
89     $$  1367
90     $D  1371
91     K     1    12                                      1
92     K1          ROUTING THRU REACH 11 - 12
93     Y                             1      1
94     Y1    1
95     Y6   .1    .08    .1   1280   1340   1050   .06
96     Y7    0   1340   100   1320   290   1320   300    1300    350    1280
97     Y7  470   1300   520   1320   650   1340
98     K          13                                      1
99     K1          INFLOW HYDROGRAPH - KEEN POND SUBAREA
100    M     1     1    .91          14.53                         1
101    P         21.3   111   123    133    142
102    T                                        1      .05
103    W    .9    .45
104    X   -1.5  -.05     2
105    K     3    14                                      1
106    K1          COMBINE HYDROGRAPHS AT KEEN POND
107    K     1    15                                      1
108    K1          RESERVOIR ROUTING - THRU KEEN POND
109    Y                             1      1
110    Y1    1                                   887     -1
111    Y4  1272  1272.5  1273  1273.5  1274  1275   1276   1277.5  1278   1278.3
112    Y41278.7  1279.3  1281.5  1284
113    Y5    0     27    79    158    252    485    762    1252    1449    1598
114    Y5  1842  2325   5190  9850
115    $A    0   91.8   123    197
116    $E  1243  1272  1280   1300
117    $$  1272
118    $D1277.5
```

```
 111       9H     0    7113    1.3    1/7
 116       $E  1243    1272    1280   1300
 117       $$  1272
 118       $D1277.5
 119       $B    50       1    1258    .25   1272  1281.5
 120       $B    50       1    1258     .5   1272  1281.5
 121       $B    50       1    1258      1   1772  1281.5
 122       K      1      16                                           1
 123       K1           ROUTING THRU REACH 15 - 16
 124       Y                                   1        1
 125       Y1     1
 126       Y6    .1     .06     .1    1237    1280   1850   .0097
 127       Y7     0   1280     200   1260     590   1240    650   1237    655   1237
 128       Y7   700   1240    1050   1260    1260   1280
 129       K     99
```

1   PREVIEW OF SEQUENCE OF STREAM NETWORK CALCULATIONS

```
                              RUNOFF HYDROGRAPH AT        1
                              ROUTE HYDROGRAPH TO         2
                              ROUTE HYDROGRAPH TO         3
                              ROUTE HYDROGRAPH TO         4
                              ROUTE HYDROGRAPH TO         5
                              RUNOFF HYDROGRAPH AT        6
                              COMBINE  2 HYDROGRAPHS AT   7
                              ROUTE HYDROGRAPH TO         8
                              ROUTE HYDROGRAPH TO         9
                              RUNOFF HYDROGRAPH AT       10
                              ROUTE HYDROGRAPH TO        11
                              ROUTE HYDROGRAPH TO        12
                              RUNOFF HYDROGRAPH AT       13
                              COMBINE  3 HYDROGRAPHS AT  14
                              ROUTE HYDROGRAPH TO        15
                              ROUTE HYDROGRAPH TO        16
                              END OF NETWORK
```

```
1********************************
FLOOD HYDROGRAPH PACKAGE (HEC-1)
DAM SAFETY VERSION    JULY 1978
  LAST MODIFICATION  26 FEB 79
*********************************

RUN  DATE* 79/12/20.
     TIME* 14.10.42.
```

KEEN POND DAM   ****   VAN AUKEN CREEK
CANAAN TWP., WAYNE COUNTY, PA.
NDI # PA-00092   PA DER # 64-13

JOB SPECIFICATION

NO	NHR	NMIN	IDAY	IHR	IMIN	METRC	IPLT	IPRT	NSTAN
300	0	15	0	0	0	0	0	-4	0

JOPER	NWT	LROPT	TRACE
5	0	0	0

MULTI-PLAN ANALYSES TO BE PERFORMED
NPLAN= 3 NRTIO= 1 LRTIO= 1

RTIOS=   .79

PEAK FLOW AND STORAGE (END OF PERIOD) SUMMARY FOR MULTIPLE PLAN-RATIO ECONOMIC COMPUTATIONS
FLOWS IN CUBIC FEET PER SECOND (CUBIC METERS PER SECOND)
AREA IN SQUARE MILES (SQUARE KILOMETERS)

RATIOS APPLIED TO FLOWS

OPERATION	STATION	AREA	PLAN	RATIO 1 .39
HYDROGRAPH AT	1	.89 (2.31)	1 (2 (3 (	987. 27.95)(987. 27.95)(987. 27.95)(
ROUTED TO	2	.89 (2.31)	1 (2 (3 (	38. 1.07)(38. 1.07)(38. 1.07)(
ROUTED TO	3	.89 (2.31)	1 (2 (3 (	38. 1.07)(38. 1.07)(38. 1.07)(
ROUTED TO	4	.89 (2.31)	1 (2 (3 (	38. 1.07)(38. 1.07)(38. 1.07)(
ROUTED TO	5	.89 (2.31)	1 (2 (3 (	38. 1.07)(38. 1.07)(38. 1.07)(
HYDROGRAPH AT	6	9.36 (24.24)	1 (2 (3 (	5369. 152.03)(5369. 152.03)(5369. 152.03)(
2 COMBINED	7	10.25 (26.55)	1 (2 (3 (	5388. 152.58)(5388. 152.58)(5388. 152.58)(
ROUTED TO	8	10.25	1	4459.

ROUTED TO	8	10.25	1	4459.		
		(26.55)	(131.72)(			
			2	4659.		
			(131.92)(			
			3	4659.		
			(131.92)(			
ROUTED TO	9	10.25	1	4659.		
		(26.55)	(131.92)(			
			2	4659.		
			(131.92)(			
			3	4659.		
			(131.92)(			
HYDROGRAPH AT	10	3.37	1	2390.		
		(8.73)	(67.68)(			
			2	2390.		
			(67.68)(			
			3	2390.		
			(67.68)(			
ROUTED TO	11	3.37	1	1044.		
		(8.73)	(29.57)(			
			2	1044.		
			(29.57)(			
			3	1044.		
			(29.57)(			
ROUTED TO	12	3.37	1	1044.		
		(8.73)	(29.57)(			
			2	1044.		
			(29.57)(			
			3	1044.		
			(29.57)(			
HYDROGRAPH AT	13	.91	1	1051.		
		(2.36)	(29.76)(			
			2	1051.		
			(29.76)(			
			3	1051.		
			(29.76)(			
3 COMBINED	14	14.53	1	5805.		
		(37.63)	(164.38)(			
			2	5805.		
			(164.38)(			
			3	5805.		
			(164.38)(			
ROUTED TO	15	14.53	1	24847.		
		(37.63)	(703.59)(			
			2	21596.		
			(611.53)(			
			3	17869.		
			(505.98)(			
ROUTED TO	16	14.53	1	22836.		
		(37.63)	(646.64)(			
			2	17847.		

ROUTED TO   16   14.53   1   22036.
                 (37.63)   (446.64)(
                                   2   19847.
                                   (561.77)(
                                   3   17060.
                                   (483.08)(

1   SUMMARY OF DAM SAFETY ANALYSIS
                                            ELK   LAKE

PLAN 1 ....   INITIAL VALUE   SPILLWAY CREST   TOP OF DAM
                        ELEVATION   1419.01   1419.00   1424.90
                        STORAGE   2722.   2920.   4061.
                        OUTFLOW   0.   0.   198.

RATIO OF PMF	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
.39	1421.09	0.00	3301.	38.	0.00	48.75	0.00

PLAN 2 ....   INITIAL VALUE   SPILLWAY CREST   TOP OF DAM
                        ELEVATION   1419.01   1419.00   1424.90
                        STORAGE   2922.   2920.   4061.
                        OUTFLOW   0.   0.   198.

RATIO OF PMF	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
.39	1421.09	0.00	3301.	38.	0.00	48.75	0.00

PLAN 3 ....   INITIAL VALUE   SPILLWAY CREST   TOP OF DAM
                        ELEVATION   1419.01   1419.00   1424.90
                        STORAGE   2922.   2920.   4061.
                        OUTFLOW   0.   0.   198.

RATIO OF PMF	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
.39	1421.09	0.00	3301.	38.	0.00	48.75	0.00

                           PLAN 1   STATION   3

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS
.39	38.	1371.1	49.00

                           PLAN 2   STATION   3

                              MAXIMUM   MAXIMUM   TIME

PLAN 2   STATION   3

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS
.39	38.	1371.1	47.00

PLAN 3   STATION   3

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS
.39	38.	1371.1	49.00

PLAN 1   STATION   4

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS
.39	38.	1331.1	50.00

PLAN 2   STATION   4

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS
.39	38.	1331.1	50.00

PLAN 3   STATION   4

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS
.39	38.	1331.1	50.00

PLAN 1   STATION   5

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS
.39	38.	1300.1	50.50

PLAN 2   STATION   5

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS
.39	38.	1300.1	50.50

PLAN 3   STATION   5

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS
.39	39.	1300.1	50.50

1
SUMMARY OF DAM SAFETY ANALYSIS

PLAN 1 ....

	INITIAL VALUE	SPILLWAY CREST	TOP OF DAM
ELEVATION	1290.98	1291.00	1296.70
STORAGE	92.	92.	409.
OUTFLOW	0.	0.	976.

RATIO OF PMF	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
.39	1300.45	3.75	950.	4659.	15.50	44.50	0.00

PLAN 2 ....

	INITIAL VALUE	SPILLWAY CREST	TOP OF DAM
ELEVATION	1290.98	1291.00	1296.70
STORAGE	92.	92.	409.
OUTFLOW	0.	0.	976.

RATIO OF PMF	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
.39	1300.45	3.75	950.	4659.	15.50	44.50	0.00

PLAN 3 ....

	INITIAL VALUE	SPILLWAY CREST	TOP OF DAM
ELEVATION	1290.98	1291.00	1296.70
STORAGE	92.	92.	409.
OUTFLOW	0.	0.	976.

RATIO OF PMF	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
.39	1300.45	3.75	950.	4659.	15.50	44.50	0.00

PLAN 1   STATION   9

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS
.37	4659.	1280.8	44.50

PLAN 2   STATION   9

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS

PLAN 2   STATION   9

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS
.37	4659.	1288.8	44.50

PLAN 3   STATION   9

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS
.39	4659.	1288.8	44.50

SUMMARY OF DAM SAFETY ANALYSIS

LAKE LADORA

PLAN 1 ....

	INITIAL VALUE	SPILLWAY CREST	TOP OF DAM
ELEVATION	1367.01	1367.00	1371.00
STORAGE	1604.	1601.	2718.
OUTFLOW	1.	0.	1694.

RATIO OF PMF	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
.39	1370.06	0.00	2442.	1044.	0.00	46.25	0.00

PLAN 2 ....

	INITIAL VALUE	SPILLWAY CREST	TOP OF DAM
ELEVATION	1367.01	1367.00	1371.00
STORAGE	1604.	1601.	2718.
OUTFLOW	1.	0.	1694.

RATIO OF PMF	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
.39	1370.06	0.00	2442.	1044.	0.00	46.25	0.00

PLAN 3 ....

	INITIAL VALUE	SPILLWAY CREST	TOP OF DAM
ELEVATION	1367.01	1367.00	1371.00
STORAGE	1604.	1601.	2718.
OUTFLOW	1.	0.	1694.

RATIO OF PMF	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
.39	1370.06	0.00	2442.	1044.	0.00	46.25	0.00

PLAN 1   STATION   12

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS

PLAN 1   STATION 12

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS
.39	1044.	1285.0	46.25

PLAN 2   STATION 12

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS
.39	1044.	1285.0	46.25

PLAN 3   STATION 12

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS
.39	1044.	1285.0	46.25

SUMMARY OF DAM SAFETY ANALYSIS

KEEN

PLAN 1 ....

	INITIAL VALUE	SPILLWAY CREST	TOP OF DAM
ELEVATION	1272.00	1272.00	1277.50
STORAGE	887.	887.	1449.
OUTFLOW	0.	0.	1252.

RATIO OF PMF	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
.39	1281.51	4.01	1933.	24847.	3.98	45.25	45.00

PLAN 2 ....

	INITIAL VALUE	SPILLWAY CREST	TOP OF DAM
ELEVATION	1272.00	1272.00	1277.50
STORAGE	887.	887.	1449.
OUTFLOW	0.	0.	1252.

RATIO OF PMF	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
.39	1281.51	4.01	1933.	21596.	4.13	45.50	45.00

PLAN 3 ....

	INITIAL VALUE	SPILLWAY CREST	TOP OF DAM
ELEVATION	1272.00	1272.00	1277.50
STORAGE	887.	887.	1449.
OUTFLOW	0.	0.	1252.

RATIO OF PMF	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	

	OF PMF	RESERVOIR W.S.ELEV	DEPTH OVER DAM	STORAGE AC-FT	OUTFLOW CFS	OVER TOP HOURS	MAX OUTFLOW HOURS	HOURS
	.39	1281.51	4.01	1933.	24847.	3.58	45.75	45.00

PLAN 2 ....

	INITIAL VALUE	SPILLWAY CREST	TOP OF DAM
ELEVATION	1272.00	1272.00	1277.50
STORAGE	887.	887.	1449.
OUTFLOW	0.	0.	1252.

RATIO OF PMF	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
.39	1281.51	4.01	1933.	21596.	4.13	45.50	45.00

PLAN 3 ....

	INITIAL VALUE	SPILLWAY CREST	TOP OF DAM
ELEVATION	1272.00	1272.00	1277.50
STORAGE	887.	887.	1449.
OUTFLOW	0.	0.	1252.

RATIO OF PMF	MAXIMUM RESERVOIR W.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
.39	1281.51	4.01	1933.	17869.	4.44	46.00	45.00

PLAN 1   STATION   16

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS
.39	22836.	1249.7	45.50

PLAN 2   STATION   16

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS
.39	19847.	1249.0	45.50

PLAN 3   STATION   16

RATIO	MAXIMUM FLOW,CFS	MAXIMUM STAGE,FT	TIME HOURS
.39	17060.	1248.3	46.00

1*******************************
FLOOD HYDROGRAPH PACKAGE (HEC-1)
DAM SAFETY VERSION   JULY 1978
   LAST MODIFICATION 26 FEB 79
****
EOI ENCOUNTERED.

APPENDIX E

PLATES

DAM SITE

NEW YORK

NEW JERSEY

LOCATION PLAN

KEEN LAKE DAM

PA-00092   PLATE I

DAM SITE

DRAINAGE AREA
14.5   SQ. MI.

REACH 15-16

Little
Keen Pond
1291

Keen
Pond
1272

Keen Pond

ROOSEVELT

LAKE LODORE
1307

Headley's
Pond
1438

VICINITY MAP
U.S.G.S. QUADRANGLE
HONESDALE, PA.
KEEN LAKE DAM

SCALE: 1"= 2,000'
PA-00092   PLATE II

PA-000
PLATE

KEENE'S POND
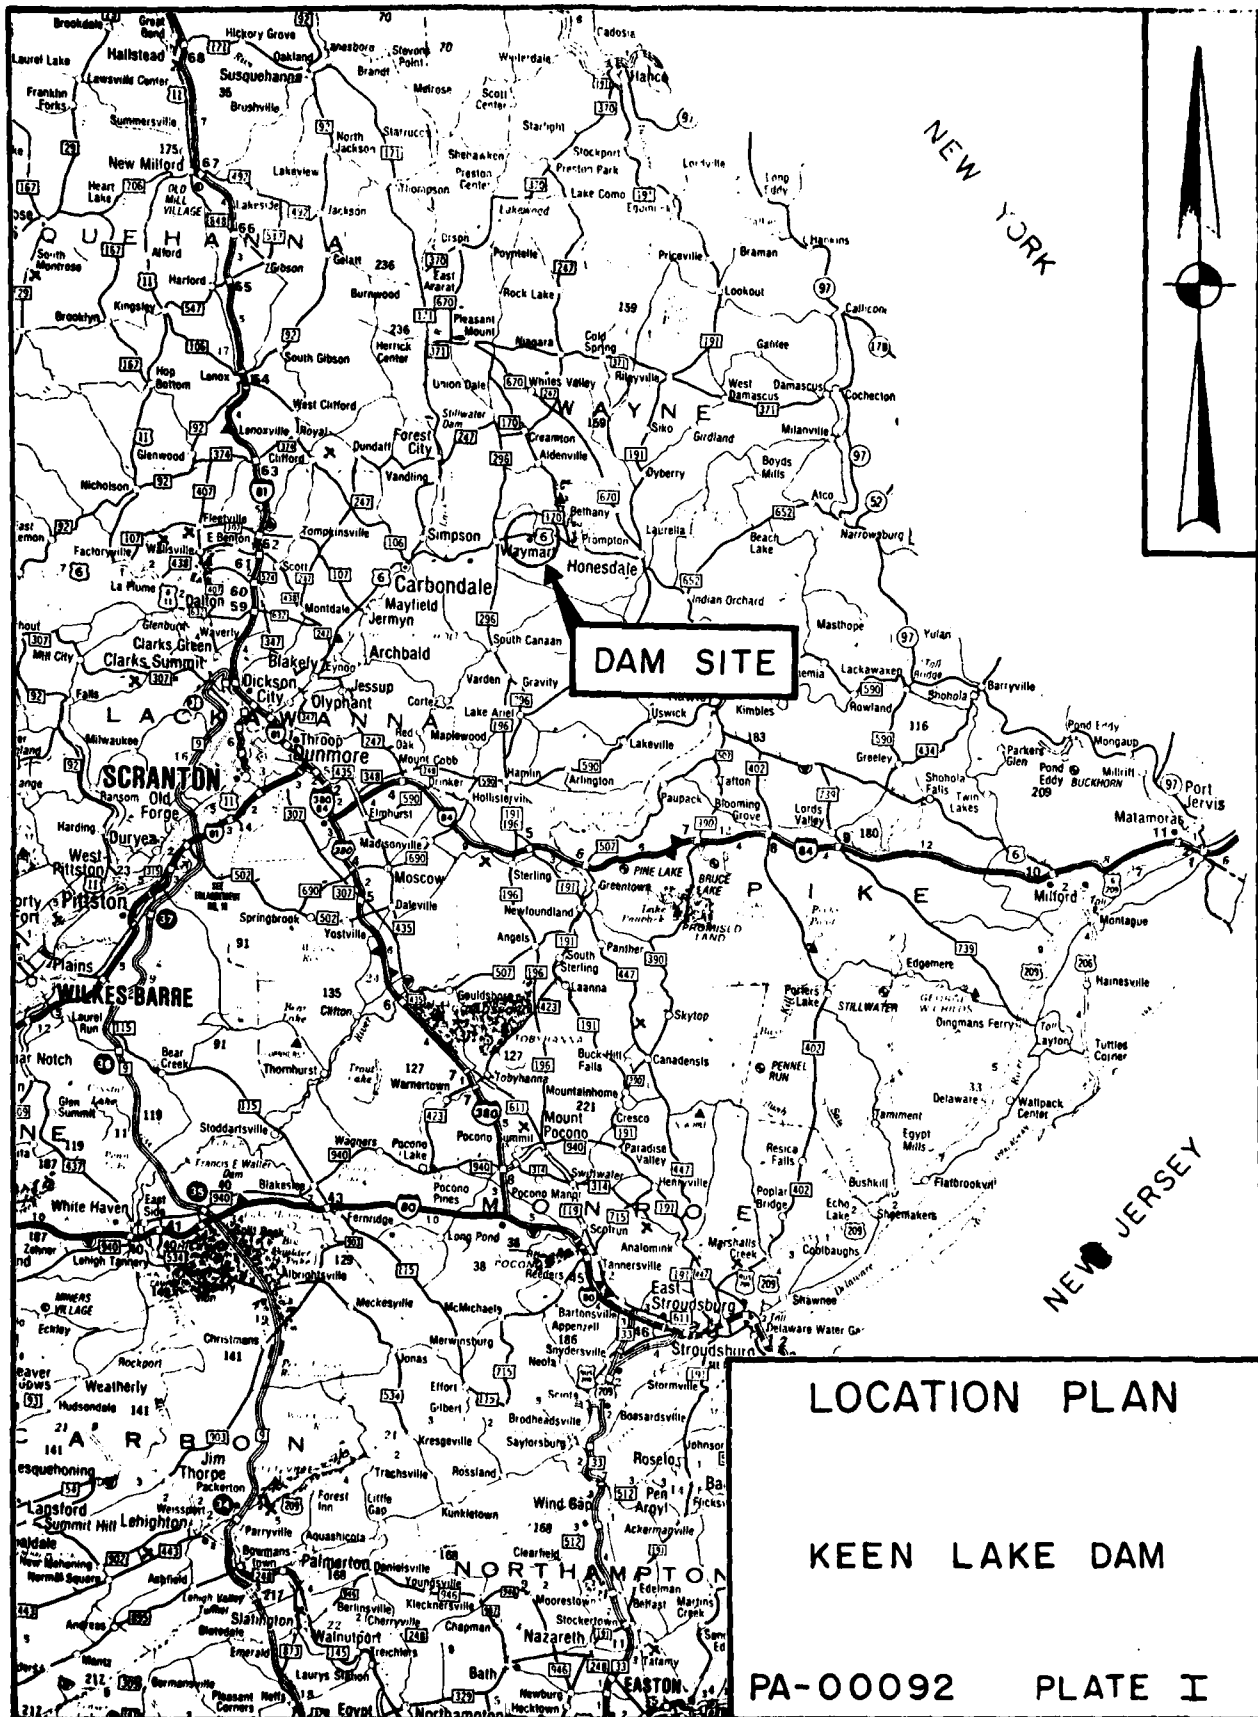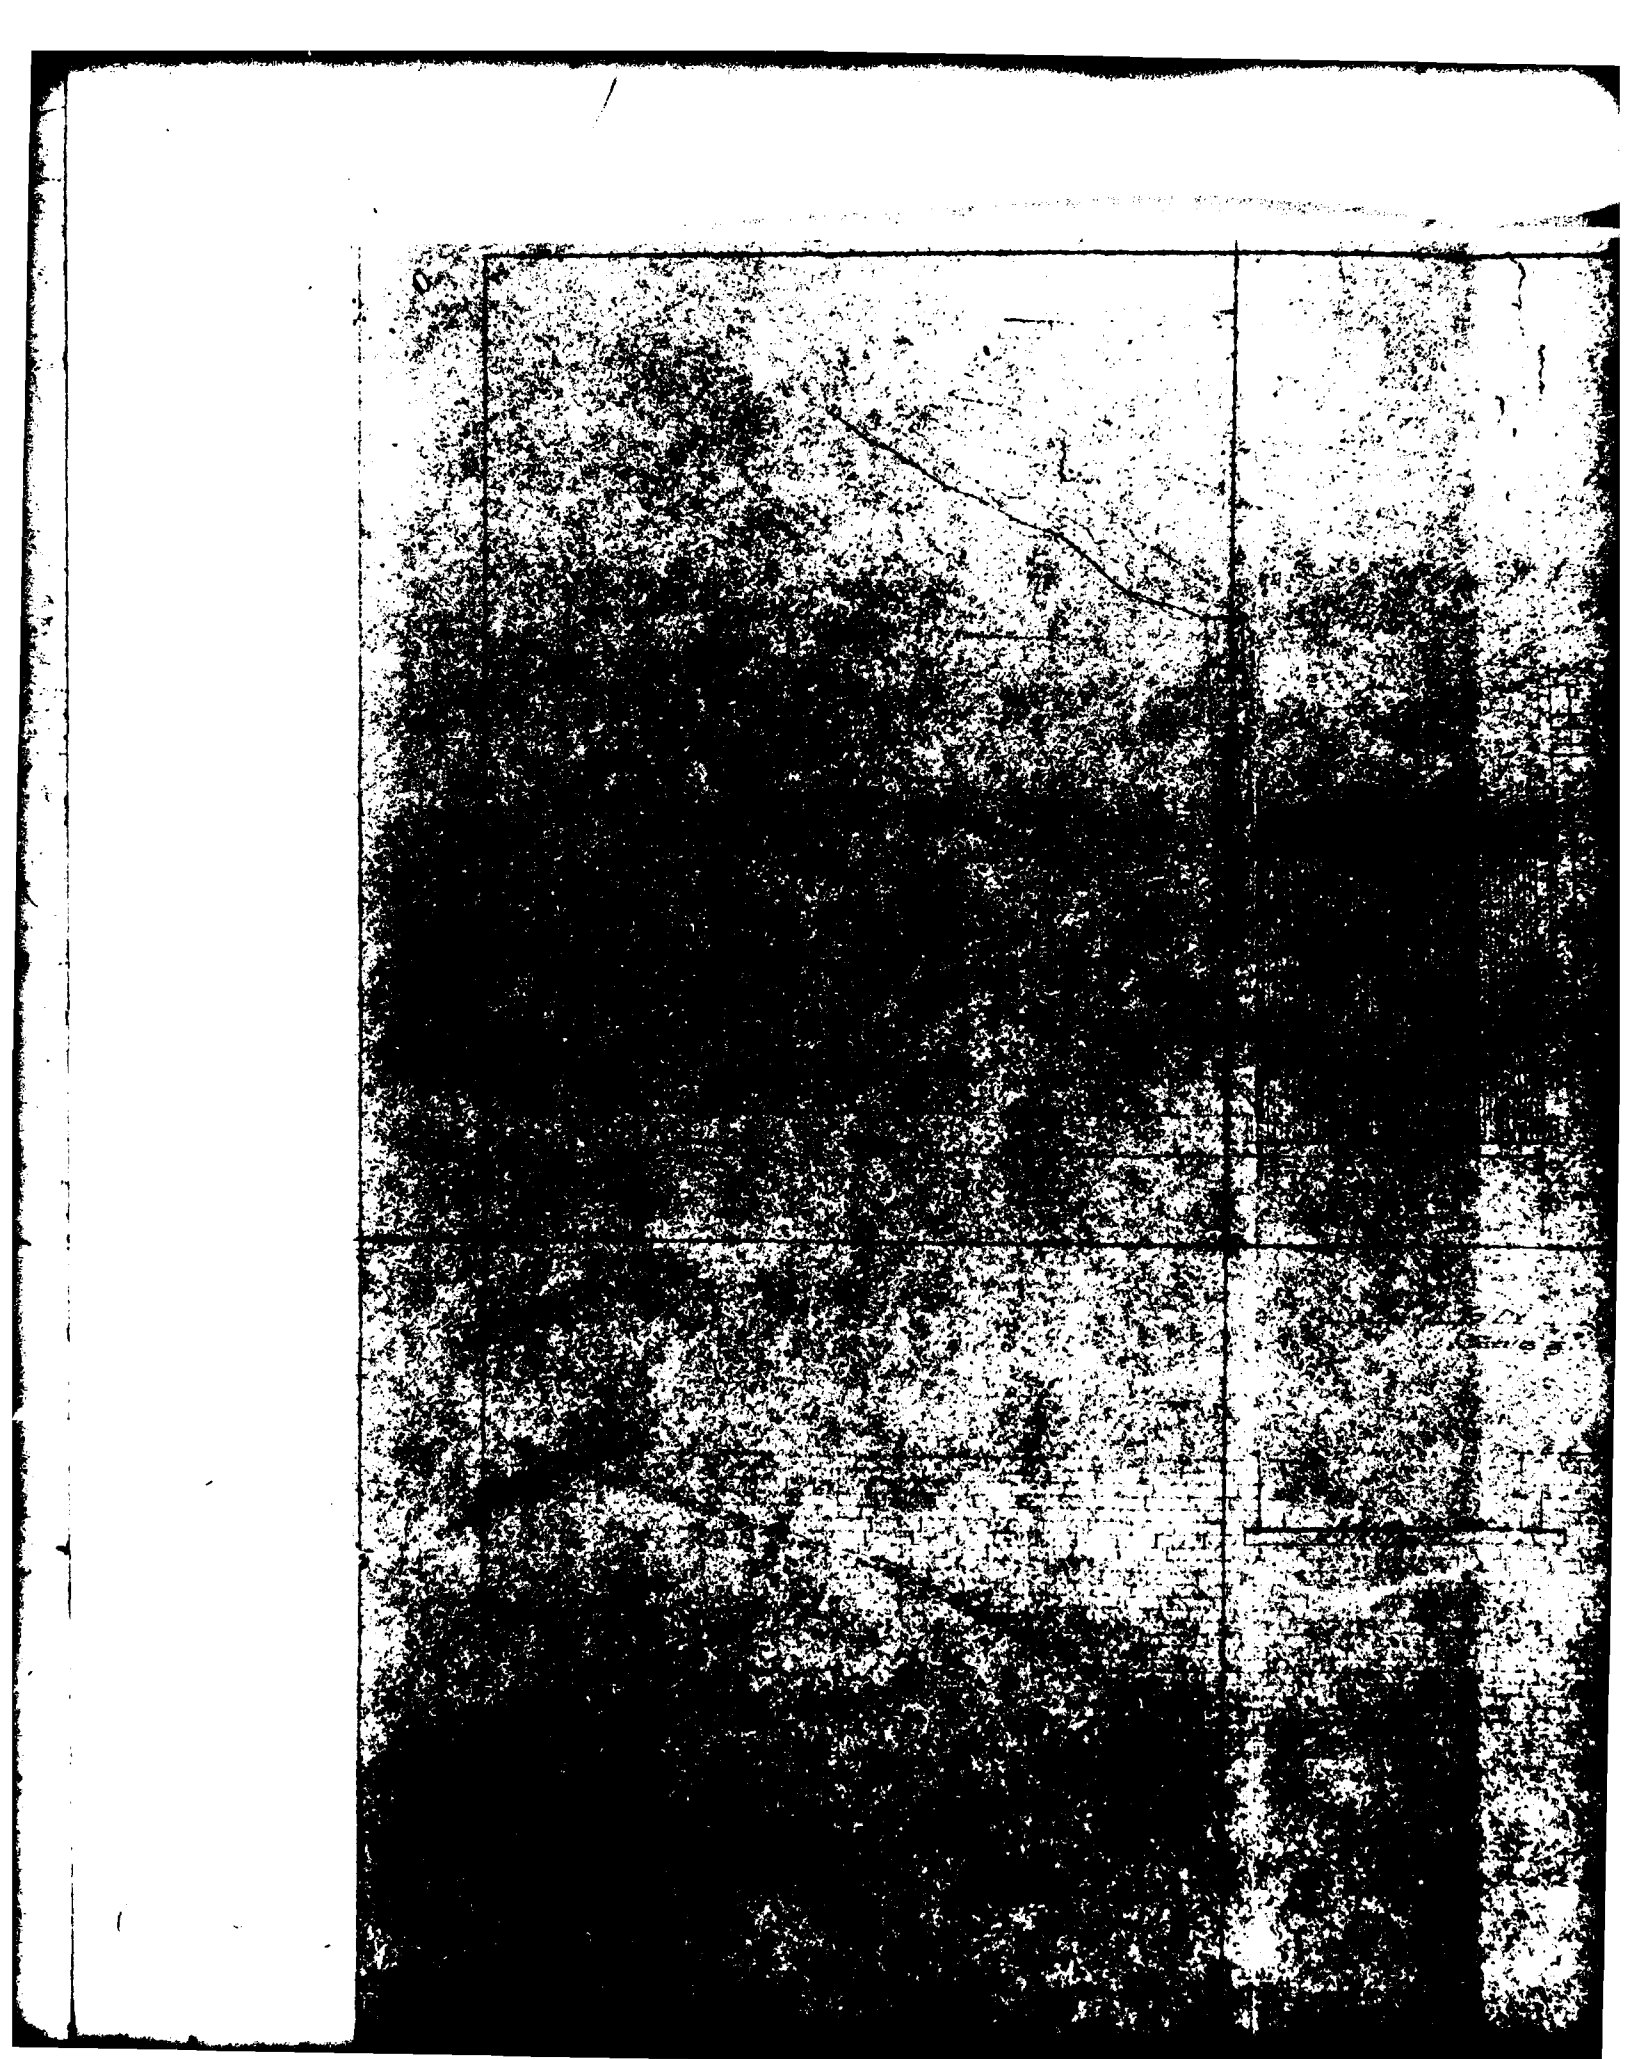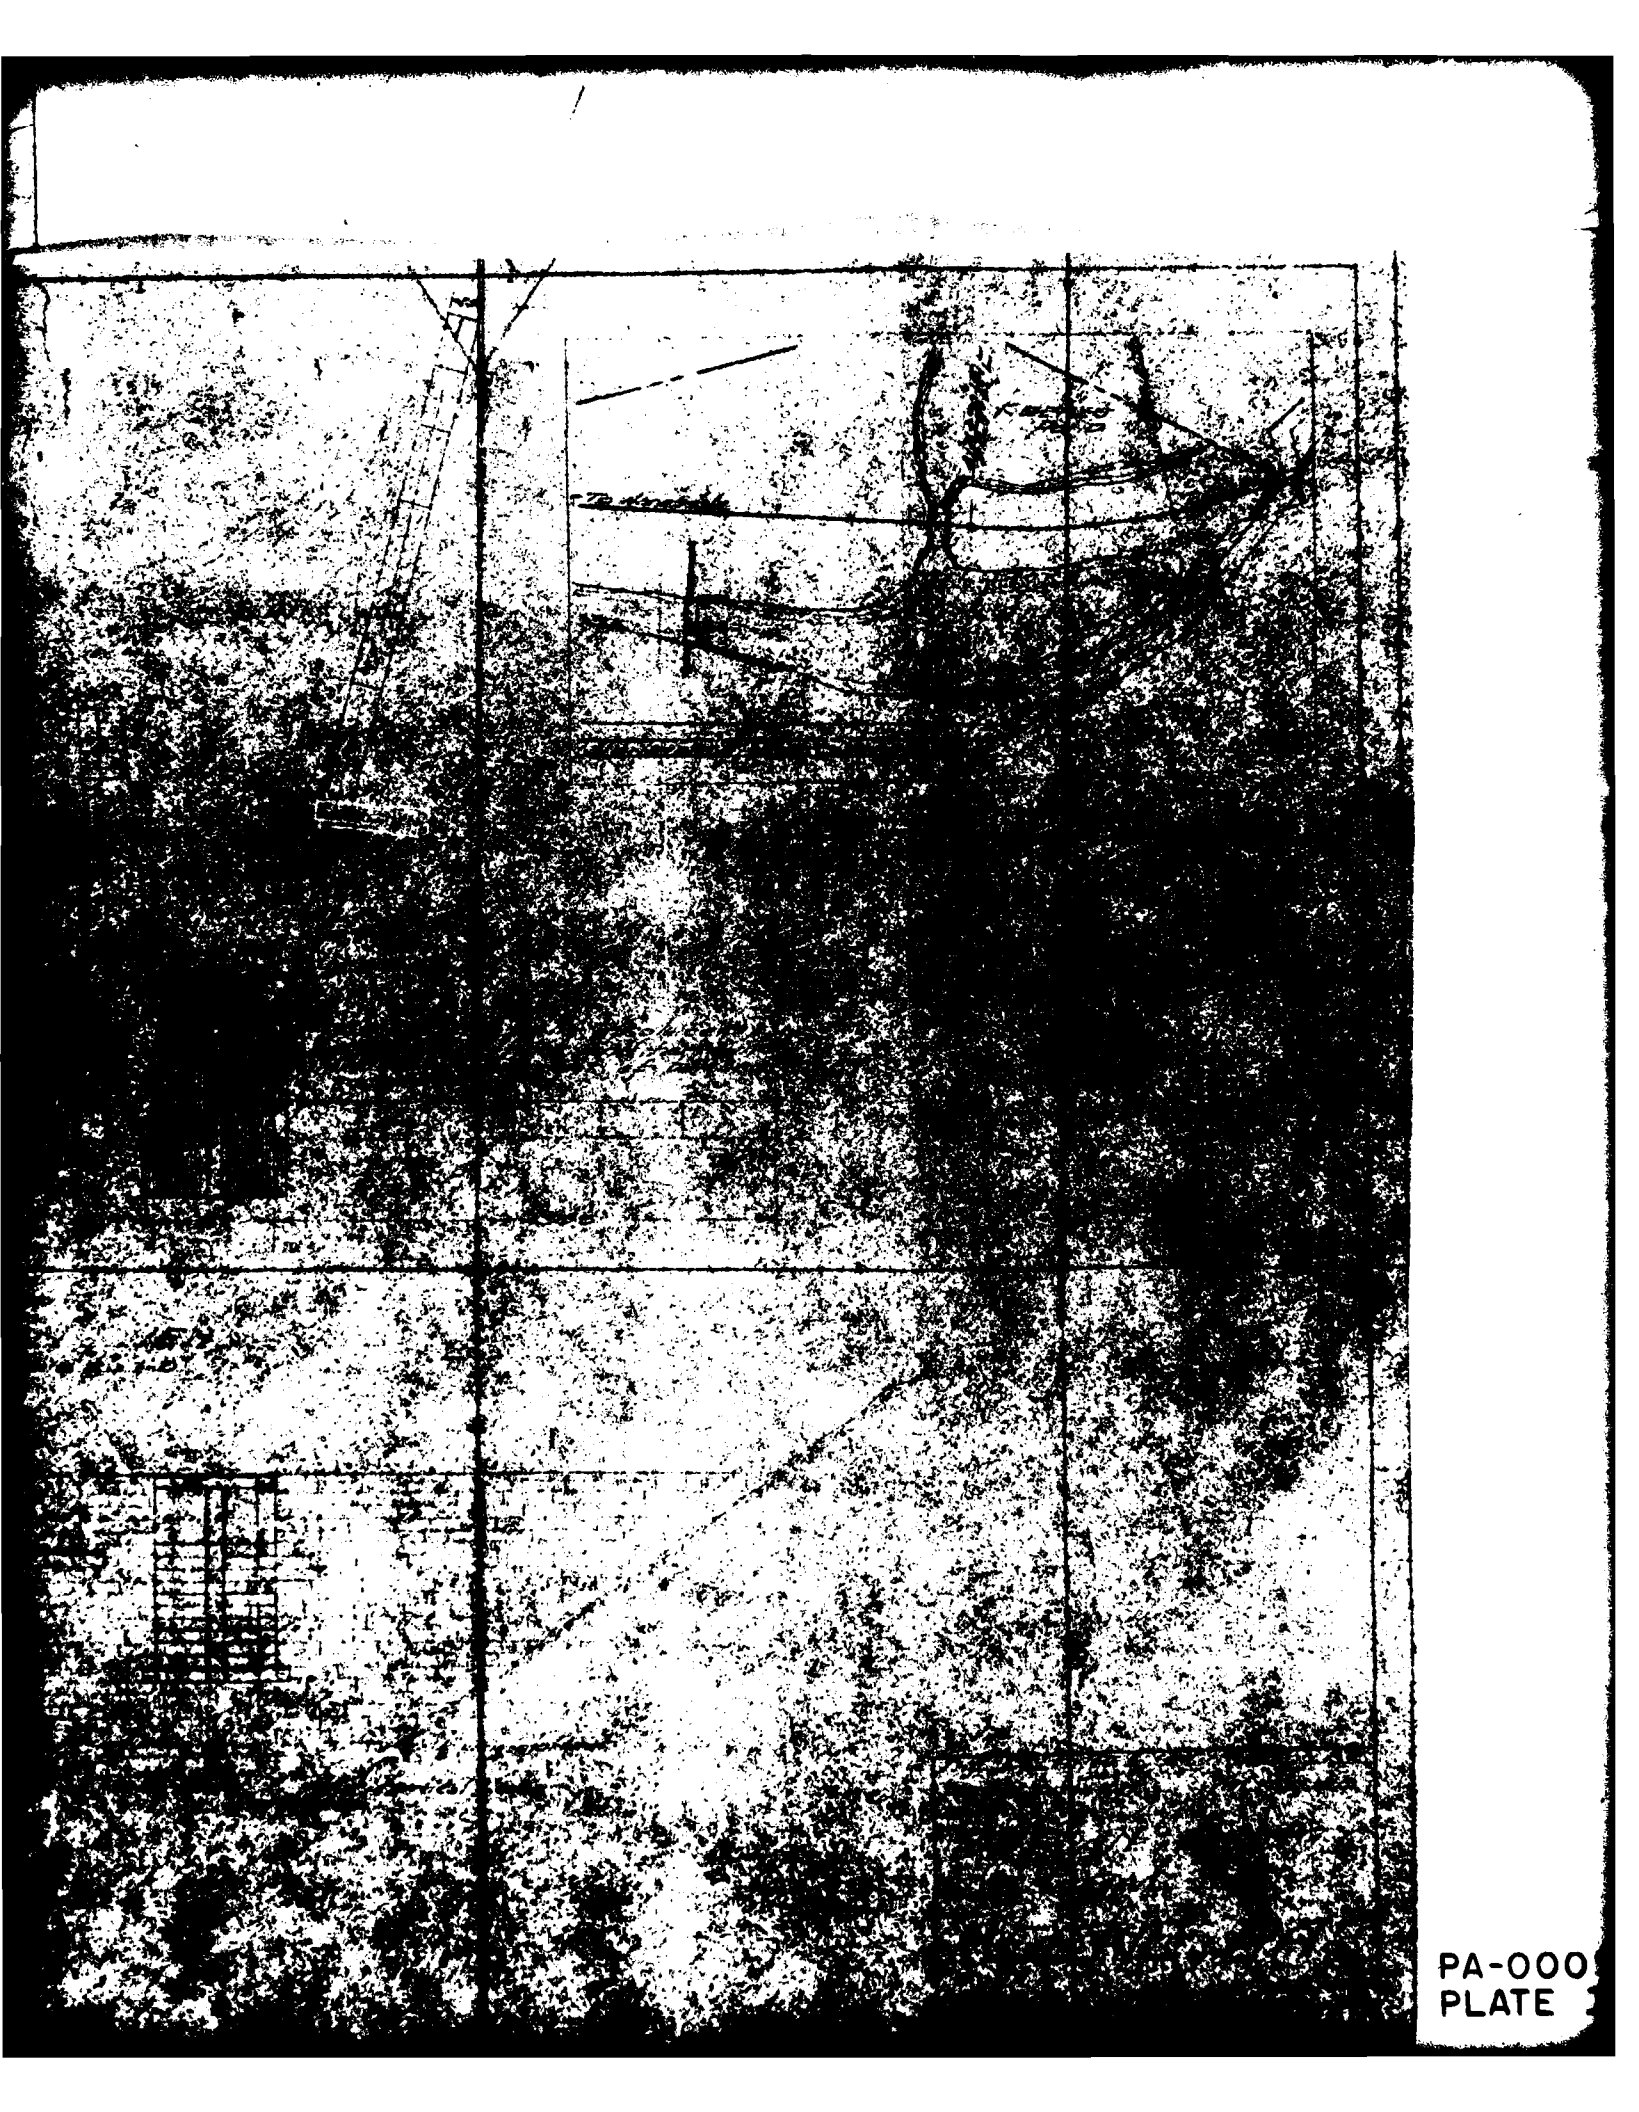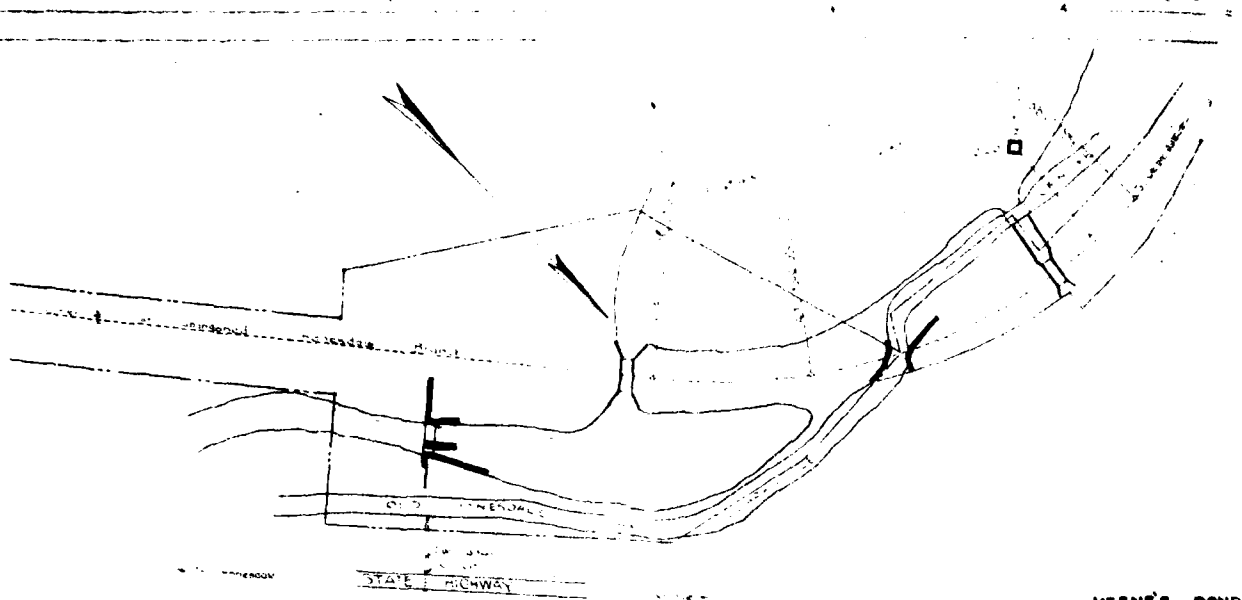
LOCATION PLAN
Scale: 1" = 100'

PLAN
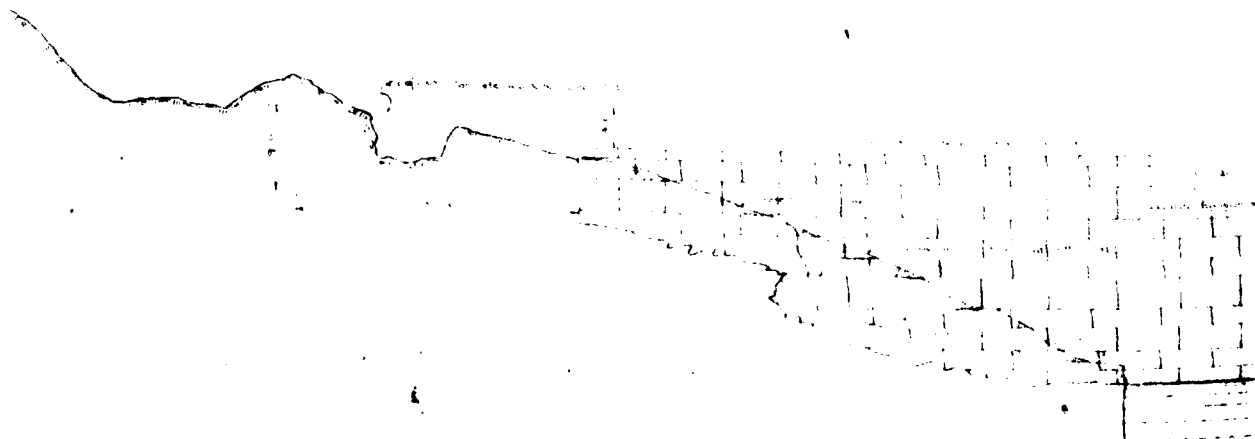
ELEVATION

SECTION C-C

APPENDIX F

GEOLOGIC REPORT

GEOLOGIC REPORT

Bedrock - Dam and Reservoir

Formation Name: Catskill Formation - undifferentiated.

Lithology: Grayish red to greenish gray and mottled red-gray siltstone interbedded with silt-shale, and fine sandstone.

Structure

The site is within the Pocono Plateau area and the beds are essentially horizontal. There is probably a slight regional dip to the west, toward the Lackawanna Syncline. Air Photo fracture traces trend: N45°E, N20°E and N30°W.

Overburden

This dam was built in the 1830's and almost no foundation information is available. The site is within the limits of Pleistocene glaciation and variable thicknesses of ground moraine and outwash sand and gravel can be expected in the area.

In 1933, a cut-off trench was dug at the upstream edge of the spillway and was reported to be four feet deep, in clay.

Aquifer Characteristics

The rocks of the Catskill Formation are essentially impermeable, ground water moves entirely along bedding planes and fractures. The most permeable aquifers in the region are the sands and gravels of glacial origin, which are commonly present in the stream valleys.

Discussion

The overburden in the gorge is small and it is likely that the wall was founded on rock. Leakage under the dam and in the right abutment continued after the 1933 repairs. The clay reported at the spillway could be the fill placed behind the wall. The leakage is apparently not serious, and at this late date is not likely to cause deterioration of either the bedrock or the till.

Sources of Information

1. Manuscript Geologic Map of the Waymart Quadrangle, in open file, Pa. Geologic Survey, Harrisburg, Pa.

2. Berg, T.M. (1977) "Geology of the Pocono Pines and Mt. Pocono Quadrangles". Pa. Geologic Survey, 4th series, Atlas 204cd.

3. Air Photos. Scale 1:24,000, dated 1969.

4. Inspection reports and correspondence in file.

key
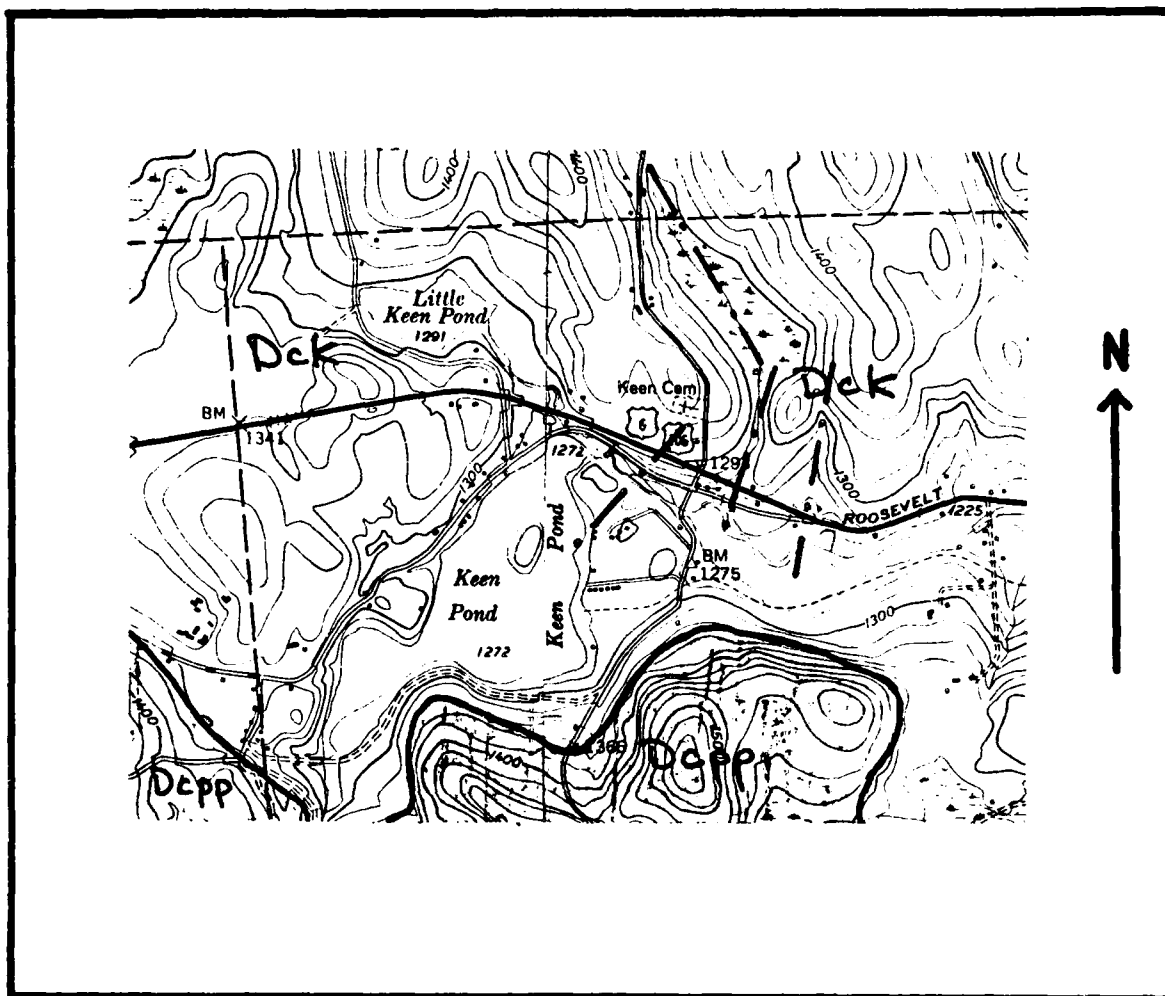
Dck	Catskill Fm. – undifferentiated
Depp	Catskill Fm. – Packerton member through Poplar Gap member
—.—.	air photo fracture trace

SCALE 1:24000

CONTOUR INTERVAL 20 FEET